

Soil Moisture Active Passive (SMAP) Project

Level 1B_S0_LoRes

Product Specification Document

Revision B

Prepared by:

M Mariyetta
Barry Weiss, Mariyetta Maatyan
SMAP SDS Data Architect

4/12/2016
Date

Approved by:

Richard West
Richard West
SMAP Radar Instrument Scientist

4/21/2016
Date

E. Sayfi
Elias Sayfi
SMAP SDS Systems Engineer

4/22/16
Date

Maher Hanna
Maher Hanna
SMAP SDS Project Element Manager

4/26/16
Date

Simon Yueh
Simon Yueh
SMAP Project Scientist

4/27/16
Date

Paper copies of this document may not be current and should not be relied on for official purposes.
The current version is in the Product Data Management System (PDMS): <https://pdms.jpl.nasa.gov/>

March 21, 2016
D-72544



Jet Propulsion Laboratory
California Institute of Technology

DOCUMENT CHANGE LOG

Revision	Date	Sections Changed	Reason for Change (ECR #)
-	15 December 2014	All	Initial Version
A	20 Jul 2015	1.3	Modified description of data collection plan for radar.
A	20 Jul 2015	4.2	Recalculate the Data Volume Estimates
A	20 Jul 2015	4.4	Added text that describes metadata with MD5 checksums on ISO 19139 compliant XML
A	20 Jul 2015	4.4	Added time/dimensionSize, time/resolution, sample/DimensionSize and sample/resolution to the metadata
A	20 Jul 2015	4.5.2, 4.6.10, 4.6.11, 4.6.12, 4.6.13, 4.6.14, 4.6.15, 4.6.16, 4.6.17, 4.6.36, 4.6.37, 4.6.38, 4.6.39	Generated separate elements in the Sigma0 Data Group base on transmission channel for all of the following geolocation elements: center_lat, center_lon, cylindrical_grid_row_index, cylindrical_grid_column_index, polar_grid_row_index, polar_grid_column_index

Revision	Date	Sections Changed	Reason for Change (ECR #)
A	20 Jul 2015	4.5.2, 4.6.51, 4.6.54, 4.6.64, 4.6.67,	Added sigma0 measures in the Sigma0 Data Group before noise subtraction for all four channels.
A	20 Jul 2015	4.5.2, 4.6.52, 4.6.55, 4.6.65, 4.6.68	Added sigma0 measures to the Sigma0 Data Group based on wind model for all four channels
A	20 Jul 2015	4.5.3, 4.6.77, 4.6.78, 4.6.79, 4.6.80, 4.6.93, 4.6.94, 4.6.95, 4.6.96, 4.6.97, 4.6.98, 4.6.99, 4.6.100	Generated separate elements in the Sigma0 Slice Data Group base on transmission channel for all of the following geolocation elements: slice_lat, slice_lon, slice_cylindrical_grid_row_index, slice_cylindrical_grid_column_index, slice_polar_grid_row_index, slice_polar_grid_column_index
A	20 Jul 2015	4.5.3, 4.6.103, 4.6.106, 4.6.113, 4.6.116,	Added slice sigma0 measures in the Sigma0 Slice Data Group before noise subtraction for all four channels.
A	20 Jul 2015	4.5.3, 4.6.118, 4.6.124, 4.6.125	Added slice_wind_speed, slice_wind_direction and slice_significant_wave_height to the Sigma0 Slice Data Group.
A	20 Jul 2015	4.5.3, 4.6.104,	Added slice sigma0 measures to the Sigma0 Slice Data Group based on

Revision	Date	Sections Changed	Reason for Change (ECR #)
		4.6.107, 4.6.114, 4.6.117,	wind model for all four channels
A	20 Jul 2015	4.6.8, 4.6.74	Adjusted the maximum value for the center_altitude_std_dev and slice_altitude_std_dev to 10000 meters.
A	20 Jul 2015	4.6.71, 4.6.134, 4.6.135	Indicates that ocean measures used for calibration do not appear for sigma0s over land.
A	20 Jul 2015	4.6.75	Adjusted maximum of slice_area to 1.8e8 square meters.
A	20 Jul 2015	7, 8	Modified maximum number of antenna scans in product.
B	23 Oct 2015	3.2, 4.6.36, 4.6.43, 4.6.144	Changed reference frame from science orbit to the fixed instrument coordinate system to represent pitch, yaw and roll.
B	23 Oct 2015	4.6.44	Changed sc_geodetic_alt_ellipsoid valid_max to 750000 meters
B	23 Oct 2015	4.6.58 – 4.6.61	Updated sigma0_qual_flag_xx for Nadir pointing angle bit

TBD, TBR, TBS LOG

Section/Page	Description	Due Date
Page 133	Final version of Level 4 Carbon Document has not yet been recorded	January 29, 2015

1	INTRODUCTION.....	1
1.1	Identification.....	1
1.2	Scope.....	1
1.3	The SMAP Experiment.....	1
1.4	SMAP Data Products	3
1.5	Content Overview	4
1.6	Related SMAP Project Documents.....	5
1.7	Applicable Documents.....	6
2	DATA PRODUCT ORGANIZATION	7
2.1	File Format.....	7
2.2	HDF5 Notation.....	7
2.2.1	HDF5 File	7
2.2.2	HDF5 Group.....	8
2.2.3	HDF5 Dataset	8
2.2.4	HDF5 Datatype	8
2.2.5	HDF5 Dataspace	10
2.2.6	HDF5 Attribute	10
2.3	SMAP File Organization	10
2.3.1	Structure.....	10
2.3.2	Data.....	10
2.3.3	Element Types.....	11
2.3.4	File Level Metadata	12
2.3.5	Local Metadata	13
2.4	Data Definition Standards	14
2.4.1	Double Precision Time Variables	16
2.4.2	Array Representation.....	16
3	INTERFACE CHARACTERISTICS	18
3.1	Coordinate Systems	18
3.2	Spacecraft Attitude and Modeling Spacecraft Slews	19
3.3	Fill and Gap Values	21

March 21, 2016

SMAP Level 1B_S0_LoRes Product Specification

3.4	Bit Flag Variables	24
3.5	Flexible Data Design	24
3.6	Access to Product Element Dimensions	25
4	DATA DEFINITION	26
4.1	Product Overview	26
4.1.1	Level 1B Radar Product	26
4.1.2	Level 1B S0 LoRes Metadata.....	26
4.1.3	Level 1B S0 LoRes Data	27
4.2	Data Volume Estimates	28
4.3	SMAP Level 1B Radar Product File Names	29
4.4	L1B_S0_LoRes Product Metadata	32
4.5	Data Structure.....	52
4.5.1	Spacecraft Data Group.....	52
4.5.2	Sigma0 Data Group	55
4.5.3	Sigma0 Slice Data Group	61
4.6	Element Definitions	67
4.6.1	antenna_look_angle	67
4.6.2	antenna_scan_angle	67
4.6.3	antenna_scan_time	68
4.6.4	antenna_scan_time_utc	68
4.6.5	antenna_scan_mode_flag	69
4.6.6	antenna_scan_qual_flag	70
4.6.7	center_altitude	71
4.6.8	center_altitude_std_dev	71
4.6.9	center_gradient.....	72
4.6.10	center_lat_h	72
4.6.11	center_lat_v	73
4.6.12	center_lon_h	73
4.6.13	center_lon_v	74
4.6.14	cylindrical_grid_row_index_h	74

March 21, 2016

SMAP Level 1B_S0_LoRes Product Specification

4.6.15	cylindrical_grid_row_index_v	75
4.6.16	cylindrical_grid_column_index_h	76
4.6.17	cylindrical_grid_column_index_v	76
4.6.18	declination	77
4.6.19	earth_boresight_azimuth	77
4.6.20	earth_boresight_incidence_h	78
4.6.21	earth_boresight_incidence_v	78
4.6.22	faraday_rotation_angle	79
4.6.23	faraday_rotation_correction_hh	79
4.6.24	faraday_rotation_correction_hv	80
4.6.25	faraday_rotation_correction_vh	80
4.6.26	faraday_rotation_correction_vv	81
4.6.27	footprint_area	81
4.6.28	gain_correction_factor_hh	82
4.6.29	gain_correction_factor_hv	82
4.6.30	gain_correction_factor_vh	83
4.6.31	gain_correction_factor_vv	83
4.6.32	kp_hh	83
4.6.33	kp_hv	84
4.6.34	kp_vh	85
4.6.35	kp_vv	85
4.6.36	pitch	86
4.6.37	polar_grid_row_index_h	86
4.6.38	polar_grid_row_index_v	87
4.6.39	polar_grid_column_index_h	87
4.6.40	polar_grid_column_index_v	88
4.6.41	polarization_rotation_angle	89
4.6.42	right_ascension	89
4.6.43	roll	90
4.6.44	sc_alongtrack_velocity	90

March 21, 2016

SMAP Level 1B_S0_LoRes Product Specification

4.6.45	sc_geodetic_alt_ellipsoid	91
4.6.46	sc_nadir_angle	91
4.6.47	sc_nadir_lat.....	91
4.6.48	sc_nadir_lon.....	92
4.6.49	sc_radial_velocity	92
4.6.50	selected_frequency.....	93
4.6.51	sigma0_hh	93
4.6.52	sigma0_hh_noise.....	94
4.6.53	sigma0_hh_wind_model.....	94
4.6.54	sigma0_hv.....	95
4.6.55	sigma0_hv_noise.....	95
4.6.56	sigma0_hv_wind_model.....	96
4.6.57	sigma0_mode_flag	96
4.6.58	sigma0_qual_flag_hh	97
4.6.59	sigma0_qual_flag_hv.....	99
4.6.60	sigma0_qual_flag_vh.....	100
4.6.61	sigma0_qual_flag_vv.....	102
4.6.62	sigma0_time_seconds.....	103
4.6.63	sigma0_time_utc.....	104
4.6.64	sigma0_vh.....	105
4.6.65	sigma0_vh_noise.....	105
4.6.66	sigma0_vh_wind_model.....	106
4.6.67	sigma0_vv.....	106
4.6.68	sigma0_vv_noise	107
4.6.69	sigma0_vv_wind_model	107
4.6.70	sigma0s_per_scan.....	107
4.6.71	sigma0_spatial_resolution.....	108
4.6.72	significant_wave_height	108
4.6.73	slant_range	109
4.6.74	slice_altitude	109

March 21, 2016

SMAP Level 1B_S0_LoRes Product Specification

4.6.75	slice_altitude_std_dev	110
4.6.76	slice_area.....	110
4.6.77	slice_azimuth_length	111
4.6.78	slice_cylindrical_grid_column_index_h.....	111
4.6.79	slice_cylindrical_grid_column_index_v	112
4.6.80	slice_cylindrical_grid_row_index_h.....	113
4.6.81	slice_cylindrical_grid_row_index_v	113
4.6.82	slice_earth_incidence_h	114
4.6.83	slice_earth_incidence_v	115
4.6.84	slice_elevation_length	115
4.6.85	slice_faraday_rotation_angle	116
4.6.86	slice_gain_correction_factor_hh	116
4.6.87	slice_gain_correction_factor_hv.....	117
4.6.88	slice_gain_correction_factor_vh.....	117
4.6.89	slice_gain_correction_factor_vv.....	118
4.6.90	slice_gradient.....	118
4.6.91	slice_kp_hh	119
4.6.92	slice_kp_hv	119
4.6.93	slice_kp_vh	120
4.6.94	slice_kp_vv	120
4.6.95	slice_lat_h	121
4.6.96	slice_lat_v	121
4.6.97	slice_lon_h	122
4.6.98	slice_lon_v	122
4.6.99	slice_polar_grid_column_index_h.....	123
4.6.100	slice_polar_grid_column_index_v	124
4.6.101	slice_polar_grid_row_index_h.....	125
4.6.102	slice_polar_grid_row_index_v	125
4.6.103	slice_polarization_rotation_angle.....	126
4.6.104	slice_sigma0_hh	127

March 21, 2016

SMAP Level 1B_S0_LoRes Product Specification

4.6.105	slice_sigma0_hh_noise	127
4.6.106	slice_sigma0_hh_wind_model	128
4.6.107	slice_sigma0_hv	128
4.6.108	slice_sigma0_hv_noise	129
4.6.109	slice_sigma0_hv_wind_model	129
4.6.110	slice_sigma0_qual_flag_hh	130
4.6.111	slice_sigma0_qual_flag_hv	131
4.6.112	slice_sigma0_qual_flag_vh	133
4.6.113	slice_sigma0_qual_flag_vv	135
4.6.114	slice_sigma0_vh	136
4.6.115	slice_sigma0_vh_noise	137
4.6.116	slice_sigma0_vh_wind_model	137
4.6.117	slice_sigma0_vv	138
4.6.118	slice_sigma0_vv_noise	138
4.6.119	slice_sigma0_vv_wind_model.....	139
4.6.120	slice_significant_wave_height.....	139
4.6.121	slice_slant_range.....	140
4.6.122	slice_snr_hh.....	140
4.6.123	slice_snr_hv.....	141
4.6.124	slice_snr_vh.....	141
4.6.125	slice_snr_vv	142
4.6.126	slice_wind_speed	142
4.6.127	slice_wind_direction	143
4.6.128	slice_x_factor_hh.....	144
4.6.129	slice_x_factor_hv	144
4.6.130	slice_x_factor_vh.....	145
4.6.131	slice_x_factor_vv	145
4.6.132	snr_hh	146
4.6.133	snr_hv	146
4.6.134	snr_vh	146

March 21, 2016

SMAP Level 1B_S0_LoRes Product Specification

4.6.135	snr_vv.....	147
4.6.136	wind_speed.....	147
4.6.137	wind_direction.....	148
4.6.138	x_factor_hh.....	149
4.6.139	x_factor_hv.....	149
4.6.140	x_factor_vh.....	149
4.6.141	x_factor_vv.....	150
4.6.142	x_pos.....	150
4.6.143	x_vel.....	151
4.6.144	yaw.....	151
4.6.145	y_pos.....	152
4.6.146	y_vel.....	152
4.6.147	z_pos.....	153
4.6.148	z_vel.....	153
5	APPENDIX A – ACRONYMS AND ABBREVIATIONS	155
6	APPENDIX B - SMAP DATA PRODUCT SPECIFICATION DOCUMENTS.....	163
7	APPENDIX C – SHAPES IN THE L1B_S0_LORES PRODUCT.....	165
8	APPENDIX D – L1B_S0_LORES DIMENSIONS	166
9	APPENDIX E – L1B_S0_LORES UNITS.....	167

1 INTRODUCTION

1.1 Identification

This is the Product Specification Document (PSD) for Level 1B_S0_LoRes data product for the Science Data System (SDS) of the Soil Moisture Active Passive (SMAP) project. The Level 1B_S0_LoRes product provides Real Aperture Radar data downloaded from SMAP spacecraft. This document applies to any standard L1B_S0_LoRes product based upon data acquired by the SMAP radar instrument.

1.2 Scope

This Product Specification Document describes the file format of the L1B_S0_LoRes Product. The SMAP Science Data Management and Archive Plan provides a more comprehensive explanation of these data within the complete context of the SMAP instrument, algorithms, and software.

1.3 The SMAP Experiment

The Soil Moisture Active Passive (SMAP) mission will enhance the accuracy and the resolution of space-based measurements of terrestrial soil moisture and freeze-thaw state. SMAP data products will have a noteworthy impact on multiple relevant and current Earth Science endeavors. These include:

- Understanding of the processes that link the terrestrial water, the energy and the carbon cycles,
- Estimations of global water and energy fluxes over the land surfaces,
- Quantification of the net carbon flux in boreal landscapes,
- Forecast skill of both weather and climate,
- Predictions and monitoring of natural disasters including floods, landslides and droughts, and
- Predictions of agricultural productivity.

To provide these data, the SMAP mission will deploy a satellite observatory in a near polar, sun synchronous orbit. The observatory will house an L-band radiometer that operates at 1.414 GHz and an L-band radar that operates at 1.225 GHz. The instruments will share a rotating reflector antenna with a 6 meter aperture that scans over a 1000 km swath.

As the spacecraft flies from north to south on *descending* orbits, the SMAP instruments will view Earth locations at approximately 06:00 local time. As the


March 21, 2016

SMAP Level 1B_S0_LoRes Product Specification

spacecraft flies from south to north, on *ascending* orbits, the SMAP instruments will view Earth locations at approximately 18:00 local time. The spacecraft will operate in a cycle of 117 repeatable orbits.

Each time that the spacecraft repeats the orbit cycle, the nadir path on the Earth's surface may not vary by more than 20 km. The flight plan enables scientists to collect data over any region of the Earth over seasonal and annual cycles and avoid diurnal variations. The combined flight pattern and viewing design will enable the observatory to view almost all of the Earth's land mass once every three days.

The SMAP radiometer records microwave emissions from the top 5 cm in the soil with a spatial resolution of about 40 km. Scientific applications based on radiometer measure in the same frequency range have established this approach as an accurate means to detect the presence or water in near surface soil. SMAP radar will provide backscatter measurements at 1 km resolution. The combined instrumentation will enable SMAP to generate highly accurate global soil moistures at 9 km resolution.

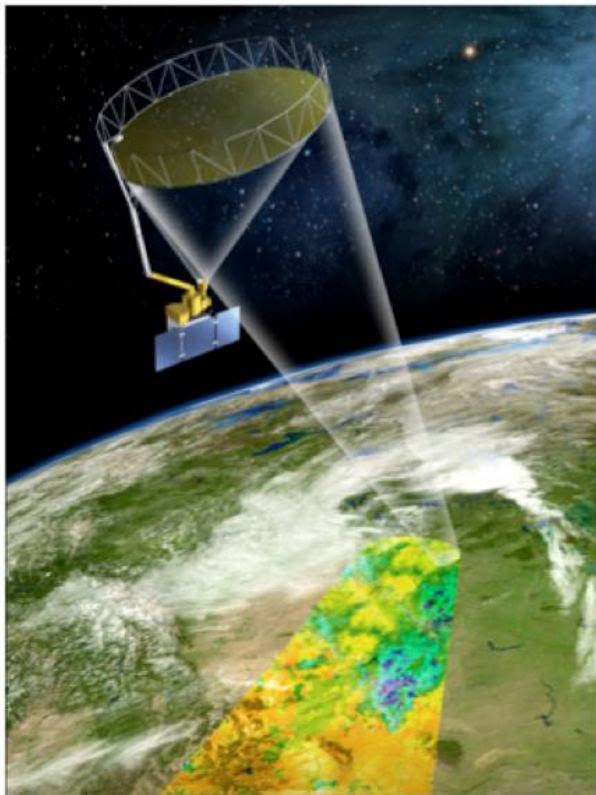

Geophysical retrievals based on SMAP radar will indicate the presence of standing water, the freeze/thaw condition of the surface as well as measures of surface roughness and vegetation. The additional information will enable SMAP processors to select appropriate locations for soil moisture retrievals and modeling. In addition, the freeze/thaw data will contribute to models that measure the Net Ecosystem Exchange (NEE) of carbon between the Earth's surface and the atmosphere in Boreal regions.

Figure 1: Artist's Concept of SMAP Observatory

1.4 SMAP Data Products

The SMAP mission will generate 15 distributable data products. The products represent four levels of data processing. Level 1 products contain instrument related data. Level 1 products appear in granules that are based on half orbits of the SMAP satellite. The Northernmost and Southernmost orbit locations demarcate half orbit boundaries. Level 2 products contain output from geophysical retrievals that are based on instrument data. Level 2 products also appear in half orbit granules. Level 3 products contain global output of the Level 2 geophysical retrievals for an entire day. Level 4 products contain output from geophysical models that employ SMAP data.

Table 1 lists the distributable SMAP data products. The colors in the table categorize the products by level. The table specifies two sets of short names. The SMAP mission product short names were adopted by the SMAP mission to identify products. Users will find those short names in SMAP mission documentation, SMAP product file names and in the product metadata. The Data Centers will use short names defined for the Earth Observing System Data and Information System (EOSDIS) Core System (ECS). These short names categorize data products in local databases managed by the ECS. ECS short names will also appear in SMAP product metadata.

SMAP Mission Product Short Name	ECS Short Names	Description
L1A_Radar	SPL1AA	Parsed Radar Instrument Telemetry
L1A_Radiometer	SPL1AP	Parsed Radiometer Instrument Telemetry
L1B_S0_LoRes	SPL1BS0	Low Resolution Radar σ_a in Time Order
L1C_S0_HiRes	SPL1CS0	High Resolution Radar σ_a on Swath Grid
L1B_TB	SPL1BTB	Radiometer T_b in Time Order
L1C_TB	SPL1CTB	Radiometer T_b
L2_SM_A	SPL2SMA	Radar Soil Moisture, includes Freeze/Thaw State
L2_SM_P	SPL2SMP	Radiometer Soil Moisture
L2_SM_AP	SPL2SMAP	Active-Passive Soil Moisture
L3_FT_A	SPL3FTA	Daily Global Composite Freeze/Thaw State
L3_SM_A	SPL3SMA	Daily Global Composite Radar Soil Moisture
L3_SM_P	SPL3SMP	Daily Global Composite Radiometer Soil Moisture
L3_SM_AP	SPL3SMAP	Daily Global Composite Active-Passive Soil Moisture
L4_SM	SPL4TSM	Surface and Root Zone Soil Moisture
L4_C	SPL4C	Carbon Net Ecosystem Exchange

Table 1: SMAP Data Products

1.5 Content Overview

The SMAP Level 1B Radar (L1B_S0_LoRes) data product contains Real Aperture Radar normalized radar cross sections (σ_0). Each σ_0 measure represents an integration of radar Pulse Repetition Intervals (PRIs). The instantaneous field of view of each measure occupies a footprint on the Earth's surface that measures approximately 30 km in length and 5 km in width.

The SMAP mission distributes this data product in half orbit granules. The northernmost and southernmost locations on the SMAP spacecraft path demarcate granule boundaries.

SMAP orbits begin at the southernmost point on the orbit path. The SMAP spacecraft will launch into orbit 0. Orbit 1 will begin as the spacecraft crosses the southernmost location for the first time. The SMAP radar instrument gathers instrument whenever the instrument is on. Based on acquired echo measurements, the radar flight software generates synthetic aperture radar data and real aperture radar data. The SMAP Level 1C Radar product contains processed synthetic aperture data. The SMAP Level 1B Radar product contains processed real aperture data.

The SMAP radar instrument generates Real Aperture and Synthetic Aperture Radar (SAR) data. The SAR data are voluminous. Even with the high data transmission bandwidth, the SMAP spacecraft will not be able to downlink SAR resolution data all of the time. To ensure that adequate data were downlinked regularly, mission objectives determine when the spacecraft will downlink SAR data. The following criteria determine when the mission will downlink SAR data:

- The mission's major objective is the measurement of soil moisture,
- Since heavy rainfall more often takes place during afternoon hours, soil scientists prefer acquisition of data during the early morning hours, and
- Scientists interested in freeze/thaw required some evidence of change in condition during each day.

The following downlink plan was adopted to meet those objectives:

- During the descending orbit, when local time is approximately 06:00 hours, the spacecraft downlinks SAR data over land except the Antarctic. These data are collected when the rotating antenna is looking either forward or aft of the spacecraft.
- During the descending orbit, when local time is approximately 06:00 hours, the spacecraft downlinks SAR data over coastal regions. Coastal regions are defined as ocean or sea regions that lie within 1000 km of

March 21, 2016

SMAP Level 1B_S0_LoRes Product Specification

land. These data are collected only when the rotating antenna is looking forward of the spacecraft.

- During the ascending orbit, when local time is approximately 18:00 hours, the spacecraft downlinks SAR data over land except the Antarctic. These data are collected when the rotating antenna is looking either forward or aft of the spacecraft.

The instrument always downlinks Real Aperture Radar data. Thus, under nominal conditions, users should be able to collect Real Aperture Radar data over the entire Earth's surface.

On board flight software tracks radar instrument data in four distinct channels based on the polarization of the transmitted and received signal. The instrument produces h-pol chirps at a center frequency that is 1.5 MHz higher than the center of the noise channel. The instrument produces v-pol chirps at a center frequency that is 1.5 MHz lower than the center of the noise channel. Two co-polarized channels contain data transmitted and received in the same polarization. Data elements labeled with *hh* are based on horizontally polarized signals that are detected in the instrument h-pol receiver. Data elements labeled with *vv* are based on vertically polarized signals that are detected by the instrument v-pol receiver.

The two cross-pol channels contain data transmitted in one polarization but received by the receiver for the other polarization. Data elements labeled *vh* contain horizontally polarized signals that were detected by the instrument v-pol receiver. Likewise, data elements labeled *hv* contain vertically polarized signals that were detected by the instrument h-pol receiver.

The data in the L1B_S0_LoRes product are organized relative to the footprints acquired for each lower resolution IFOV. For each footprint, the product lists σ_0 values for both co-pol and cross-pol channels. The product divides each of these footprints into a uniform set of slices, and provides σ_0 values for both co-pol and cross-pol channels for each slice. In addition, the product provides additional geometric information, as well as normalized standard deviations (K_p), as well as quality information.

1.6 Related SMAP Project Documents

- SMAP L1B_S0, L1C_S0 Algorithm Theoretical Basis Document, R. West, JPL D-53052, May 31, 2012.

March 21, 2016

SMAP Level 1B_S0_LoRes Product Specification

- SMAP Science Data Management and Archive Plan, JPL D-45973, August 29, 2011.
- SMAP Pointing, Positioning, Phasing and Coordinate Systems, Volume 0: Definitions and Principle Coordinate Systems, JPL D-46018, Initial Release, May 18, 2010

1.7 Applicable Documents

- ISO 19115:2003(E) International Standard – Geographic Information – Metadata, May 1, 2003.
- ISO 19115-2:2009 International Standard – Geographic Information – Part 2: Extensions for imagery and gridded data, December 12, 2009.
- ISO 19139:2007 International Standard – Geographic Information – Metadata – XML schema implementation, May 14 2009.
- File Naming Convention for SMAP Data Products, JPL Interoffice Memorandum, SMAP-860-004-11, January 17, 2012.
- Introduction to HDF5, The HDF Group,
<http://www.hdfgroup.org/HDF5/doc/H5.intro.html>.
- HDF5: API Specification Reference Manual, The HDF Group
http://www.hdfgroup.org/HDF5/doc/RM/RM_H5Front.html
- HDF5 User's Guide Release 1.8.9, The HDF Group,
<http://hdfgroup.com/HDF5/doc/UG>, May 2012.
- NetCDF Climate and Forecast (CF) Metadata Conventions, Version 1.6, December 5, 2011.

- EASE-Grid 2.0: Incremental but Significant Improvements for Earth-Gridded Data Sets, Brodzik, M.J., et. al., National Snow and Ice Data Center, Cooperative Institute of Environmental Sciences, University of Colorado, ISPRS International Journal of Geo-Information, ISSN 2220-9964, DOI: 10.3390/igji1010032.

2 DATA PRODUCT ORGANIZATION

2.1 File Format

All SMAP standard products are in the Hierarchical Data Format version 5 (HDF5). HDF5 is a general-purpose file format and programming library for storing scientific data. The National Center for Supercomputing Applications (NCSA) at the University of Illinois developed HDF to help scientists share data regardless of the source. Use of the HDF library enables users to read HDF files on multiple platforms regardless of the architecture the platforms use to represent integer and floating point numbers. HDF files are equally accessible to routines written either in Fortran, C or C++.

A spin-off organization of the NCSA, named The HDF Group, is responsible for development and maintenance of HDF. Users should reference The HDF Group website at <http://www.hdfgroup.org> to download HDF software and documentation.

2.2 HDF5 Notation

HDF5 represents a significant departure from the conventions of previous versions of HDF. The changes that appear in HDF5 provide flexibility to overcome many of the limitations of previous releases. The basic building blocks have been largely redefined, and are more powerful but less numerous. The key concepts of the HDF5 Abstract Data Model are Files, Groups, Datasets, Datatypes, Attributes and Property Lists. The following sections provide a brief description of each of these key HDF5 concepts.

2.2.1 HDF5 File

A File is the abstract representation of a physical data file. Files are containers for HDF5 Objects. These Objects include Groups, Datasets, and Datatypes.

2.2.2 HDF5 Group

Groups provide a means to organize the HDF5 Objects in HDF5 Files. Groups are containers for other Objects, including Datasets, named Datatypes and other Groups. In that sense, groups are analogous to directories that are used to categorize and classify files in standard operating systems.

The notation for files is identical to the notation used for Unix directories. The root Group is “/”. A Group contained in root might be called “/myGroup.” Like Unix directories, Objects appear in Groups through “links”. Thus, the same Object can simultaneously be in multiple Groups.

2.2.3 HDF5 Dataset

The Dataset is the HDF5 component that stores user data. Each Dataset associates with a Dataspace that describes the data dimensions, as well as a Datatype that describes the basic unit of storage element. A Dataset can also have Attributes.

2.2.4 HDF5 Datatype

A Datatype describes a unit of data storage for Datasets and Attributes. Datatypes are subdivided into Atomic and Composite Types.

Atomic Datatypes are analogous to simple basic types in most programming languages. HDF5 Atomic Datatypes include Time, Bitfield, String, Reference, Opaque, Integer, and Float. Each atomic type has a specific set of properties. Examples of the properties associated with Atomic Datatypes are:

- Integers are assigned size, precision, offset, pad byte order, and are designated as signed or unsigned.
- Strings can be fixed or variable length, and may or may not be null-terminated.
- References are constructs within HDF5 Files that point to other HDF5 Objects in the same file.

HDF5 provides a large set of predefined Atomic Datatypes. Table 2 lists the Atomic Datatypes that are used in SMAP data products.

Table 2: HDF5 Atomic Datatypes

HDF5 Atomic Datatypes	Description
H5T_STD_U8LE	unsigned, 8-bit, little-endian integer
H5T_STD_U16LE	unsigned, 16-bit, little-endian integer
H5T_STD_U32LE	unsigned, 32-bit, little-endian integer
H5T_STD_U64LE	unsigned, 64-bit, little-endian integer
H5T_STD_I8LE	signed, 8-bit, little-endian integer
H5T_STD_I16LE	signed, 16-bit, little-endian integer
H5T_STD_I32LE	signed, 32-bit, little-endian integer
H5T_STD_I64LE	Signed, 64-bit, little-endian integer
H5T_IEEE_F32LE	32-bit, little-endian, IEEE floating point
H5T_IEEE_F64LE	64-bit, little-endian, IEEE floating point
H5T_C_S1	character string made up of one or more bytes

Composite Datatypes incorporate sets of Atomic datatypes. Composite Datatypes include Array, Enumeration, Variable Length and Compound.

- The Array Datatype defines a multi-dimensional array that can be accessed atomically.
- Variable Length presents a 1-D array element of variable length. Variable Length Datatypes are useful as building blocks of ragged arrays.
- Compound Datatypes are composed of named fields, each of which may be dissimilar Datatypes. Compound Datatypes are conceptually equivalent to structures in the C programming language.

Named Datatypes are explicitly stored as Objects within an HDF5 File. Named Datatypes provide a means to share Datatypes among Objects. Datatypes that are not explicitly stored as Named Datatypes are stored implicitly. They are stored separately for each Dataset or Attribute they describe.

None of the SMAP data products employ Enumeration or Compound data types.

2.2.5 HDF5 Dataspace

A Dataspace describes the rank and dimension of a Dataset or Attribute. For example, a “Scalar” Dataspace has a rank of 1 and a dimension of 1. Thus, all subsequent references to “Scalar” Dataspace in this document imply a single dimensional array with a single element.

Dataspaces provide considerable flexibility to HDF5 products. They incorporate the means to subset associated Datasets along any or all of their dimensions. When associated with specific properties, Dataspaces also provide the means for Datasets to expand as the application requires.

2.2.6 HDF5 Attribute

An Attribute is a small aggregate of data that describes Groups or Datasets. Like Datasets, Attributes are also associated with a particular Dataspace and Datatype. Attributes cannot be subsetting or extended. Attributes themselves cannot have Attributes.

2.3 SMAP File Organization

2.3.1 Structure

SMAP data products follow a common convention for all HDF5 Files. Use of this convention provides uniformity of data access and interpretation.

The SMAP Project uses HDF5 Groups to provide an additional level of data organization. All metadata that pertain to the complete data granule are members of the “/Metadata” Group. All other data are organized within Groups that are designed specifically to handle the structure and content of each particular data product.

2.3.2 Data

All data in HDF5 files are stored in individual Datasets. All of the Datasets in an SMAP product are assigned to an HDF5 Group. A standard field name is associated with each Dataset. The field name is a unique string identifier. The field name corresponds to the name of the data element the Dataset stores. This

March 21, 2016

SMAP Level 1B_S0_LoRes Product Specification

document lists these names with the description of each data element that they identify.

Each Dataset is associated with an HDF5 Dataspace and an HDF5 Datatype. They provide a minimally sufficient set of parameters for reading the data using standard HDF5 tools.

2.3.3 Element Types

SMAP HDF5 employs the Data Attribute “Type” to classify every data field as a specific data type. The “Type” is an embellishment upon the standard HDF5 Datatypes that is designed specifically to configure SMAP data products.

Table 3 lists all of the “Type” strings that appear in the SMAP data products. The table maps each SMAP “Type” to a specific HDF5 Datatype in both the HDF5 file and in the data buffer. The table also specifies the common conceptual data type that corresponds to the “Type” in SMAP executable code.

Table 3: Element Type Definitions

Type	HDF5 Datatype (File)	HDF5 Datatype (Buffer)	Conceptual Type
Unsigned8	H5T_STD_U8LE	H5T_NATIVE_UCHAR	unsigned integer
Unsigned16	H5T_STD_U16LE	H5T_NATIVE_USHORT	unsigned integer
Unsigned24	H5T_STD_U16LE, with precision set to 24 bits, and size set to 3 bytes.	H5T_NATIVE_INT	unsigned integer
Unsigned32	H5T_STD_U32LE	H5T_NATIVE_UINT	unsigned integer
Unsigned64	H5T_STD_U64LE	H5T_NATIVE_ULLONG	unsigned integer
Signed8	H5T_STD_I8LE	H5T_NATIVE_SCHAR	signed integer
Signed16	H5T_STD_I16LE	H5T_NATIVE_SHORT	signed

Type	HDF5 Datatype (File)	HDF5 Datatype (Buffer)	Conceptual Type
			integer
Signed32	H5T_STD_I32LE	H5T_NATIVE_INT	signed integer
Signed64	H5T_STD_I64LE	H5T_NATIVE_LLONG	signed integer
Float32	H5T_IEEE_F32LE	H5T_NATIVE_FLOAT	floating point
Float64	H5T_IEEE_F64LE	H5T_NATIVE_DOUBLE	floating point
FixLenStr	H5T_C_S1	H5T_NATIVE_CHAR	character string
VarLenStr	H5T_C_S1, where the length is set to H5T_VARIABLE	H5T_NATIVE_CHAR	character string

SMAP HDF5 files employ two different types of string representation. “VarLenStr” are strings of variable length. “VarLenStr” provides greater flexibility to represent character strings. In an effort to make SMAP HDF5 more friendly to users who wish to use netCDF software, SMAP products restrict the use of “VarLenStr”. “FixLenStr” are strings with a prescribed fixed-length. “FixLenStr” are useful for fixed length strings that are stored in large multi-dimension array. UTC time stamps are an excellent example of the type of data that store well in a “FixLenStr”.

2.3.4 File Level Metadata

All metadata that describe the full content of each granule of the SMAP data product are stored within the explicitly named “/Metadata” Group. SMAP metadata are handled using exactly the same procedures as those that are used to handle SMAP data. The contents of each Attribute that stores metadata conform to one of the SMAP Types. Like data, each metadata element is also assigned a shape. Most metadata elements are stored as scalars. A few metadata elements are stored as arrays.

March 21, 2016

SMAP Level 1B_S0_LoRes Product Specification

SMAP data products represent file level metadata in two forms. One form appears in two Attributes within the Metadata Group. Combined, those two Attributes contain a complete representation of the product metadata. The content conforms to the ISO 19115-2 models in ISO 19139 compliant XML.

The second form of the metadata appears in a set of HDF5 Groups under the “/Metadata” Group. Each of these HDF5 Groups represents one of the major classes in the ISO 19115-2 model. These HDF5 Groups contain a set of HDF5 Attributes. Each HDF5 Attributes represents a specific ISO attribute of the associated ISO class. Although this representation inherits design from the ISO model, it does not completely conform to the model. In many cases, the names of the HDF5 Attributes match those used in the ISO model. In some situations, names were changed to provide greater clarity to SMAP users who are not familiar with the ISO model. Furthermore, to ease metadata searches, the structure of Groups within Groups was limited to four levels.

2.3.5 Local Metadata

SMAP standards incorporate additional metadata that describe each HDF5 Dataset within the HDF5 file. Each of these metadata elements appear in an HDF5 Attribute that is directly associated with the HDF5 Dataset. Wherever possible, these HDF5 Attributes employ names that conform to the Climate and Forecast (CF) conventions. Table 4 lists the CF names for the HDF5 Attributes that SMAP products typically employ.

Table 4: SMAP Specific Local Attributes

CF Compliant Attribute Name	Description	Required?
units	Units of measure. Appendix E lists applicable units for various data elements in this product.	Yes
valid_max	The largest valid value for any element in the Dataset. The data type in valid_max matches the type of the associated Dataset. Thus, if the associated Dataset stores float32 values, the corresponding valid_max will also be float32.	No
valid_min	The smallest valid value for any element in the Dataset. The data type in valid_min	No

CF Compliant Attribute Name	Description	Required?
	matches the type of the associated Dataset. Thus, if the associated Dataset stores float32 values, the corresponding valid_min will also be float32.	
_FillValue	Specification of the value that will appear in the Dataset when an element is missing or undefined. The data type of _FillValue matches the type of the associated Dataset. Thus, if the associated Dataset stores float32 values, the corresponding _FillValue will also be float32.	Yes for all numeric data types
long_name	A descriptive name that clearly describes the content of the associated Dataset.	Yes
coordinates	Identifies auxiliary coordinate variables in the data product.	No
flag_values	Provides a list of flag values that appear in bit flag variables. Should be used in conjunction with local HDF5 attribute <i>flag_meanings</i> . Only appears with bit flag variables.	No
flag_masks	Provides a list of bit fields that express Boolean or enumerated flags. Only appears with bit flag variables or enumerated data types.	No
flag_meanings	Provides descriptive words or phrases for each potential bit flag value. Should be used in conjunction with local HDF5 attribute <i>flag_values</i> .	No

2.4 Data Definition Standards

Section 4.6 of this document specifies the characteristics and definitions of every data element stored in this SMAP data product. Table 5 defines each of the

specific characteristics that are listed in that section of this document. Some of these characteristics correspond with the SMAP HDF5 Attributes that are associated with each Dataset. Data element characteristics that correspond to SMAP HDF5 Attributes bear the same name. The remaining characteristics are descriptive data that help users better understand the data product content.

In some situations, a standard characteristic may not apply to a data element. In those cases, the field contains the character string 'n/a'. Hexadecimal representation sometimes indicates data content more clearly. Numbers represented in hexadecimal begin with the character string '0x'.

Table 5: Data Element Characteristic Definitions

Characteristic	Definition
Type	The data representation of the element within the storage medium. The storage class specification must conform to a valid SMAP type. The first column in table 3 lists all of the valid values that correspond to this characteristic.
Shape	The name of the shape data element that specifies the rank and dimension of a particular data set. Appendix C lists all of the valid shapes that appear in this data product.
Valid_max	The expected minimum value for a data element. In most instances, data element values never fall below this limit. However, some data elements, particularly when they do not reflect normal geophysical conditions, may contain values that fall below this limit.
Valid_min	The expected maximum value for a data element. In most instances, data element values never exceed this limit. However, some data elements, particularly when they do not reflect normal geophysical conditions, may contain values that exceed this limit.
Valid Values	Some data elements may store a restricted set of values. In those instances, this listing specifies the values that the data element may store.
Nominal Value	Some data elements have an expected value. In those instances, this listing provides that expected value. Nominal values are particularly common among a subset of the metadata elements.

Characteristic	Definition
String Length	This characteristic specifies the length of the data string that represents a single instance of the data element. This characteristic appears exclusively for data elements of FixLenStr type.
Units	Units of measure. Typical values include “deg”, “degC”, “Kelvins”, “m/s”, “m”, “m**2”, “s” and “counts”. Appendix A and Appendix E include references to important data measurement unit symbols.

2.4.1 Double Precision Time Variables

SMAP double precision time variables contain measurements relative to the J2000 epoch. Thus, these variables represent a real number of Standard International (SI) compatible seconds since 11:58:55.816 on January 1, 2000 UTC.

2.4.2 Array Representation

This document employs array notation to demonstrate and clarify the correspondence among data elements in different product data elements. The array notation adopted in this document is similar to the standards of the Fortran programming language. Indices are one based. Thus, the first index in each dimension is one. This convention is unlike C or C++, where the initial index in each dimension is zero. In multidimensional arrays, the leftmost subscript index changes most rapidly. Thus, in this document, array elements ARRAY(15,1,5) and ARRAY(16,1,5) are stored contiguously.

HDF5 is designed to read data seamlessly regardless of the computer language used to write an application. Thus, elements that are contiguous using the dimension notation in this document will appear in contiguous locations in arrays for reading applications in any language with an HDF5 interface.

This document differentiates among array indices based on relative contiguity of storage of elements referenced with consecutive numbers in that index position. A faster or fastest moving index implies that the elements with consecutive numbers in that index position are stored in relative proximity in memory. A slower or slowest moving index implies that the elements referenced with consecutive indices are stored more remotely in memory. For instance, given

March 21, 2016

SMAP Level 1B_S0_LoRes Product Specification

array element `ARRAY(15,1,5)` in Fortran, the first index is the fastest moving index and the third index is the slowest moving index. On the other hand, given array element `array[4][0][14]` in C, the first index is the slowest moving index and the third index is the fastest moving index.

3 INTERFACE CHARACTERISTICS

3.1 Coordinate Systems

The SMAP mission will use the Science Orbit Reference Frame (SRF) and the Earth Centered Rotating (ECR) coordinate systems to represent spacecraft attitude, position and relative motion. The SMAP project document entitled SMAP Pointing, Positioning, Phasing and Coordinate Systems, Volume 0: Definitions and Principle Coordinate Systems fully describes both of these coordinate systems.

The Science Orbit Reference Frame (SRF) is a right-handed coordinate system with its three axes mutually orthogonal. The SRF is defined such that the origin is at the spacecraft center of mass (CM). The +Z axis points toward Geodetic Nadir. Due to the oblateness of the Earth, the vector from the spacecraft to the geometric center of the Earth (Geocentric Nadir) is different from the vector from the spacecraft to the local WGS84 ellipsoid normal (Geodetic Nadir). The +X axis is coplanar with both the +Z axis and the spacecraft inertial velocity vector. The +X axis closely adheres to the direction of the spacecraft inertial velocity vector. The +Y axis completes the right-handed, orthogonal coordinate system. The +Y axis is normal to the orbit plane with positive sense in the direction opposite the orbit angular momentum vector.

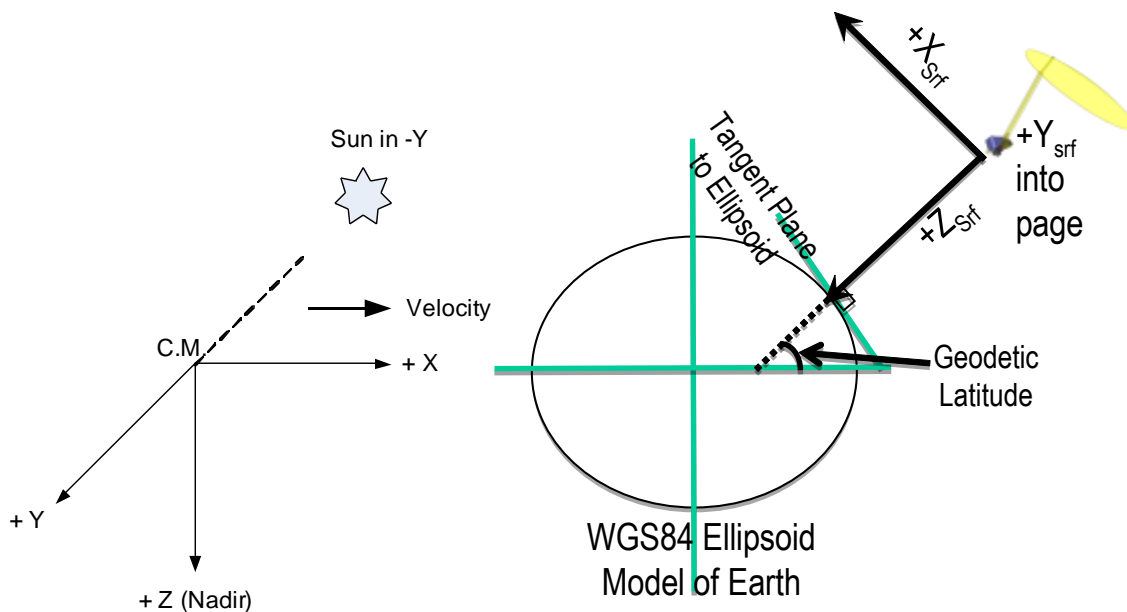


Figure 2: The Science Reference Frame Coordinate System

The Earth Centered Rotating (ECR) or Earth Centered Fixed coordinate system is a right-handed coordinate system with three mutually orthogonal axes. The origin of the system is the Earth's center of mass. The positive x-axis extends from the origin through the intersection of the Equator at 0° latitude and the Greenwich Meridian at 0° longitude. The positive z-axis extends directly North from the origin of the ECR system. Due to a slight wobbling of the Earth, the z-axis does not coincide exactly with the instantaneous rotation axis of the Earth. The y-axis completes the right-handed coordinate system as a vector from the origin to the intersection of the Equator and 90° East longitude.

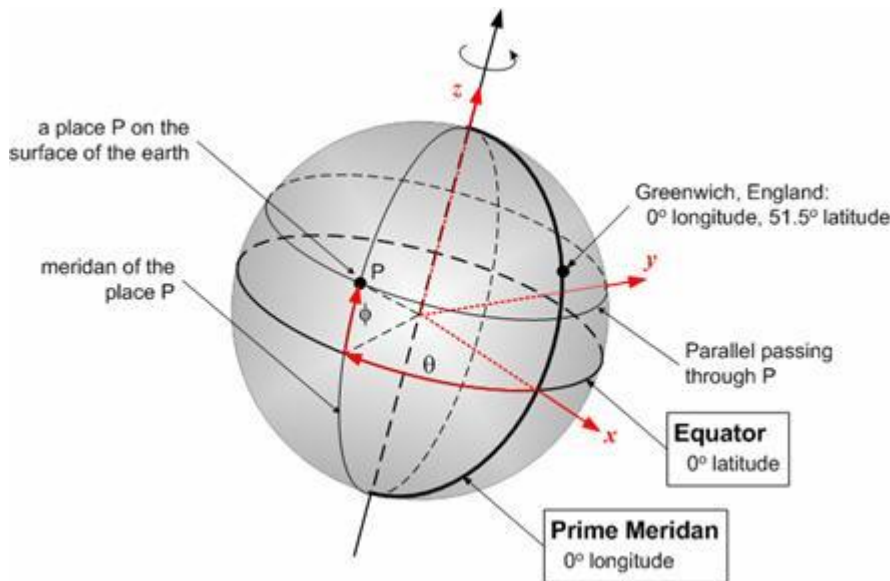


Figure 3: Earth Centered Rotating Coordinate System

The SMAP mission adopted the World Reference System WGS84 ellipsoid to define the horizontal Earth reference coordinates. The WGS84 geoid was adopted as the vertical Earth reference coordinates. Geodetic measure is used to define both the spacecraft location and the instrument target location relative to the Earth's surface.

3.2 Spacecraft Attitude and Modeling Spacecraft Slews

The SMAP SDS receives spacecraft attitude data on a regular basis from the

March 21, 2016

SMAP Level 1B_S0_LoRes Product Specification

Navigation and Ancillary Information Facility (NAIF) at JPL. Upon arrival from NAIF, these data specify the orientation of the Spacecraft Coordinate System with respect to J2000 coordinates. The NAIF data are represented in quaternions. A frames kernel describes the slight offset measured between the Spacecraft Coordinate System and the Instrument Fixed Coordinate System (INSF) from which the pitch, yaw and roll angles will be referenced.

The Science Data System converts these data into pitch, yaw and roll angles relative to the SMAP Science Orbit Reference Frame (SRF). Those angular measures appear in the SMAP Level 1 Science Data Products. Both the Science Orbit Reference Frame and the Instrument Fixed Coordinate System are defined in the SMAP Pointing, Positioning, Phasing and Coordinate System Volume 0, Revision B, April 15, 2014.

During nominal operations, after a 180 degree roll to align the Z axes of the two systems, the resulting pitch, yaw and roll angles will be very small. Indeed, in order to retain anticipated incidence angles for radar and radiometer measure, these angles will almost always be less than 1 degree. Thus, under these conditions, the definitions of pitch, yaw and roll conform to the definitions found in the SMAP Level 1 Product Specification Documents.

- Pitch is the angular rotation of the instrument fixed frame about the Y axis of the SMAP Science Orbit Reference Frame (SRF). The Y axis of the SRF is normal to the spacecraft orbital plane.
- Roll is the angular rotation of the instrument fixed frame about the X axis of the SMAP Science Orbit Reference Frame (SRF) coordinate system. The X axis of the SRF approximates the direction of spacecraft motion.
- Yaw is the angular rotation of the instrument fixed frame about the Z axis of the SMAP Science Orbit Reference Frame (SRF) coordinate system. The Z axis of the SRF runs from the center of mass of the spacecraft toward geodetic nadir.

The SMAP mission will maneuver the spacecraft from time to time. Of particular interest are maneuvers that enable the spacecraft antenna to view cold sky. Knowledge of the Euler angle that represents the spacecraft attitude during these maneuvers is critical. Generation of the Euler angle requires specification of the proper order of rotation from the science orbit reference frame to the spacecraft frame. The order of rotation that users should employ is pitch, followed by roll and then yaw. **If SMAP product users wish to reconstruct the Euler angles associated with spacecraft maneuvers, they should employ the following processing steps based on provided values of pitch, yaw and roll:**

- Roll the spacecraft angle by 180 degrees. The roll aligns the Z axis of the Instrument Fixed Coordinate System with the SMAP Science Orbit Reference Frame (It also changes the sign of the pitch and yaw).

March 21, 2016

SMAP Level 1B_S0_LoRes Product Specification

- Perform a pitch rotation. The pitch rotation is executed about the position of the Y axis of the Instrument Fixed Coordinate System at the completion of the previous roll rotation.
- Perform roll rotation. The roll rotation is executed about the position of the X axis of the Spacecraft Coordinate System at the completion of the previous pitch rotation.
- Perform the yaw rotation. The yaw rotation is executed about the position of the Z axis of the Instrument Fixed Coordinate System at the completion of the roll rotation.

To enable representation of maneuver conditions, the pitch, roll and yaw angles will need to take on larger measures. SMAP software thus enables pitch values to range from –180 degrees to 180 degrees, roll values to range from –90 to 90 degrees and yaw values to range from –180 degrees to 180 degrees.

3.3 Fill and Gap Values

SMAP data products employ fill and gap values to indicate when no valid data appear in a particular data element. Fill values ensure that data elements retain the correct shape. Gap values locate portions of a data stream that do not appear in the output data file.

Fill values appear in the SMAP L1B_S0_LoRes Product when the L1B_S0_LoRes SPS can process some, but not all, of the input data. Fill data may appear in the product in any of the following circumstances:

- One of Science Production Software (SPS) executables that generate the SMAP L1B_S0_LoRes product is unable to calculate a particular science or engineering data value. The algorithm encounters an error. The error disables generation of valid output. The SPS reports a fill value instead.
- Some of the required science or engineering algorithmic input are missing. Data that contribute to any particular backscatter footprint may appear in only some of the input data streams. Since data are valuable, the L1B_S0_LoRes product records any outcome that can be calculated with the available input. Missing data appear as fill values.
- Non-essential information is missing from the input data stream. The lack of non-essential information does not impair the algorithm from generating needed output. The missing data appear as fill values.
- Fill values appear in the input Level 1A Radar product. If only some of the input that contributes to a particular grid cell is fill data, the L1B radar SPS will most likely be able to generate some output. However, some portion of the L1B_S0_LoRes output for that grid cell may appear as fill values.

March 21, 2016

SMAP Level 1B_S0_LoRes Product Specification

SMAP data products employ a specific set of data values to connote that an element is fill. The selected values that represent fill are dependent on the data type. With the exception of bit flag variables, Table 6 lists the values that represent fill in SMAP products based on data type. Section 3.4 describes SMAP standard processing for bit flag variables.

Table 6: SMAP Product Fill Values

Type	Value	Pattern
Float32, Float64	-9999.9	Large, negative number
Signed8, NormSigned8	-127	Type minimum + 1
Signed16, NormSigned16	-32767	Type minimum + 1
Signed24	-8388607	Type minimum + 1
Signed32	-2147483647	Type minimum + 1
Signed64	-9223372036854775807	Type minimum + 1
Unsigned8	254	Type maximum - 1
Unsigned16	65534	Type maximum - 1
Unsigned24	16777214	Type maximum - 1
Unsigned32	4294967294	Type maximum - 1
Unsigned64	18446744073709551614	Type maximum - 1
FixedLenString, VarLenString	NA	Not available

No valid value in the L1B_S0_LoRes product is equal to the values that represent fill. If any exceptions should exist in the future, the L1B_S0_LoRes content will provide a means for users to discern between elements that contain fill and elements that contain genuine data values. This document will also contain a description of the method used to ascertain which elements are fill and which elements are genuine.

March 21, 2016

SMAP Level 1B_S0_LoRes Product Specification

The L1B_S0_LoRes product records gaps when entire frames within the time span of a particular data granule do not appear. Gaps can occur under one of two conditions:

- One or more complete frames of data are missing from all data streams.
- The subset of input data that is available for a particular frame is not sufficient to process any frame output.

The Level 1B_S0_LoRes Product records gaps in the product level metadata. If just one instance of the attributes *Extent/rangeBeginningDateTime* and *Extent/rangeEndingDateTime* appears in the product metadata, no substantial data gap is in the associated data product.

One of two conditions will indicate that gaps appear in the data product:

- The time period covered between *Extent/rangeBeginningDateTime* and *Extent/rangeEndingDateTime* does not cover the entire half orbit as specified in *OrbitMeasuredLocation/halfOrbitStartDateTime* and *OrbitMeasuredLocation/halfOrbitStartDateTime*.
- More than one pair of *Extent/rangeBeginningDateTime* and *Extent/rangeEndingDateTime* appears in the data product. Time periods within the time span of the half orbit that do not fall within the sets of *Extent/rangeBeginningDateTime* and *Extent/rangeEndingDateTime* constitute data gaps.

Bit flag elements in the L1B_S0_LoRes product often provide additional information about missing data. For example, the data element *antenna_scan_qual_flag* in the L1B_S0_LoRes product contains bit flags that indicate the quality of data for each antenna scan in the product. Likewise, data elements *sigma0_qual_flag_hh*, *sigma_qual_flag_vv*, *sigma0_qual_flag_hv* and *sigma0_qual_flag_vh* indicate the quality of the data for each polarization channel in each low resolution footprint. A similar set of bit flags appear for each sigma0 slice within each footprint. When a data are deemed unusable, the appropriate bits in one of these bit flags or the appropriate should indicate the rationale.

If data values associated with any particular look of the radar instrument creates untenable algorithmic conditions, the L1B_S0_LoRes SPS may curtail processing for that look. When these conditions take place, the L1B_S0_LoRes Product displays whatever values the SPS was able to calculate. When a sigma0 measure for a particular grid cell has been deemed unusable, specific bits in the appropriate *sigma0_qual_flag* will provide users with a rationale for the missing data.

should indicate the rationale.

3.4 Bit Flag Variables

SMAP data products contain bit flag variables. Bit flag variables provide quality information and processing conditions for individual data pixels within the product. This document contains a full description of each of the bit flag variables in the correct product.

SMAP executables that generate data products employ a standard method to set and clear the values of individual bits in the bit flag variables. At the beginning of the process, the executable initializes bit flag variable content. When product content is initialized, all of the defined bits in the bit flag variable contain a value of '1' and all of the bits that are undefined contain a value of '0'. As the process proceeds, conditions and quality information will lead the executable to convert appropriate defined bit values from '1' to '0'.

Thus, for bit flag variables, the initialized value of the bit flag is equivalent to the Fill value.

3.5 Flexible Data Design

HDF5 format gives the SMAP Level Products a high degree of flexibility. This flexibility in turn gives SMAP end product users the capability to write software that does not need to be modified to accommodate unforeseeable changes in the SMAP products. Since changes to the products are certain to take place over the life of the SMAP mission, users are encouraged to use software techniques that take advantage of some of the features in HDF5.

For example, users can write a product reader that selects only those product data elements they wish to read from an SMAP Level Product file. With the appropriate design, this software will not need to change, regardless of the number, the size, or the order of the current data product entries. Indeed, the only changes users need to implement would take place if they should choose to read a newly defined data element after a product upgrade.

For those users who wish to extract a specific subset of the data from an SMAP Product, the HDF5 routines H5Dopen and H5Dread (h5dopen_f and h5dread_f in FORTRAN) are very useful. H5Dopen requires two input parameters, the first is an HDF5 file/group identifier, the second is a character string that contains the name of a Dataset. H5Dopen returns the identifier for the specified Dataset in the product file. HDF5 routine H5Dread then uses the Dataset identifier to fetch the contents. H5Dread places the contents of the Dataset in a specified output variable.

Once the data element is located and read, users can generate standardized code that reads the metadata associated with each element. Users of the SMAP Level Products should employ the same methods to read metadata and standard data elements.

3.6 Access to Product Element Dimensions

Each data element in every SMAP data product is assigned a specific shape. Elements with the same shape have the same number of dimensions, and each of those dimensions have the same extent and meaning. Thus, if two data elements have the same shape, then their constituent array elements with identical indices correspond.

The SMAP L1B_S0_LoRes product employs a naming convention for shapes. The convention specifies the component dimensions. The final word in all shape names is always “Array”. The text that precedes the word “Array” provides the order of dimensions. The word that just precedes “Array” represents the dimension with the “fastest moving” index. In other words, consecutive indices in this dimension, provided the other dimension indices are identical, represent contiguous storage. For example, the Shape name `AntennaScan_Sigma0_Array` implies that the dimension where consecutive indices imply contiguous storage represents individual normalized radar cross section measurements. The other, slower moving, dimension represents complete rotations of the SMAP spacecraft antenna. Appendix C provides the nominal rank and dimension sizes for each shape that appears in the L1B_S0_LoRes product.

Appendix D provides the nominal or expected maximum product dimensions. A wise user should not, however, rely solely on Appendix D to write code that sizes arrays in the L1B_S0_LoRes. The actual dimension sizes for some of the Shapes may vary from product granule to product granule. For example, the number of frames will not remain constant among all L1B_S0_LoRes data product granules. Thus, the `AntennaScan_Sigma0_Array` Shape may be (710,270) in one product and (700,285) in another.

Appendix F contains an example of code that reads dimensions for a particular data element directly from the Radar Level 1A product.

4 DATA DEFINITION

4.1 Product Overview

4.1.1 Level 1B Radar Product

Each Level 1B S0 LoRes product granule incorporates all of the real aperture radar data that were downlinked from the SMAP spacecraft for one specific half orbit. The SMAP project delineates half orbits at the northernmost and southernmost point of each orbit path.

The major contents of the Level 1B S0 LoRes product are normalized radar cross section (σ_0) measurements that fall within the specified half orbit swath. Each σ_0 measurement represents a discrete backscatter footprint on the Earth's surface. The L1B S0 LoRes product also contains representative backscatter measures for a set of slices within each footprint. Slice boundaries run perpendicular to the major axis of the approximate ellipse that represents the boundaries of the backscatter footprint. Ancillary data elements in the product provide measures of data acquisition time and geometry as well as data quality.

4.1.2 Level 1B S0 LoRes Metadata

The SMAP Level 1B S0 LoRes metadata are representative of the entire contents of the file. The metadata appear in two forms. One form of the metadata appears in single HDF5 Attribute. That Attribute contains the complete representation of the product metadata that conforms to the ISO 19115-2 model in ISO 19139 compliant XML. The second form of the metadata appears in a set of HDF5 groups. Each HDF5 group contains a set of HDF5 attributes. The arrangement and names of the groups and their attribute components approximate major contents of the ISO model.

Metadata in ISO 19139 conformant XML enables users who are familiar with the ISO metadata standards to extract the metadata they need using software that operates with the ISO 19115-2 model and its formal representation. The set of groups and attributes enable users who are not as familiar with the ISO standard to find the particular metadata elements they need to better comprehend product content and format.

4.1.3 Level 1B S0 LoRes Data

All product elements in the Level 1B S0 LoRes Product are stored as HDF5 Datasets. Each of these datasets belong to one of three distinct HDF5 Groups. The data design employs HDF5 Groups to categorize datasets that have corresponding array elements and that relate to a common application.

The HDF5 Groups in the Level 1B_S0_LoRes product include the Spacecraft Data Group, the Sigma0 Data Group and the Sigma0 Slice Data Group. Section 4.5 of this document includes more detailed descriptions of each of the HDF5 Groups in the data product.

All of the Level 1B S0 LoRes HDF5 Groups are organized relative to Antenna Scans. The single array index for all data elements in the Spacecraft Data Group denotes the position of acquired data relative to the direction of spacecraft motion. This index in the Spacecraft Data Group also corresponds to the slowest moving index for all elements in the Sigma0 Data Group and the Sigma0 Slice Data Group. Within each data granule, the time associated with any antenna scan is a monotonically increasing function of the Antenna Scan index. Thus, a smaller antenna scan index represents an Antenna Scan that took place earlier during flight. A larger Antenna Scan index represents an antenna scan that took place later during flight. All array elements with the same Antenna Scan index fall in the same antenna scan. Thus, *antenna_scan_time(264)* specifies the instant of time when the antenna boresight aligns with the X axis of the spacecraft coordinate system within the 264th antenna rotation in the data product. Element *yaw(264)* specifies the spacecraft yaw interpolated to the same instant.

The second index in the Sigma0 Group and the Sigma0 Slice Group represents a specific sigma0 that was acquired during on the Antenna Scans. Within each Antenna Scan, the time associated with any sigma0 measure is a monotonically increasing function of the Sigma0 index. Elements in the Sigma0 Group that have a matching ordered pair of indices represent the same low resolution backscatter measure. Thus, element *sigma0_hh(100,120)* contains the horizontally co-polarized normalized radar cross section of the 100th footprint measured in the 120th Antenna Scan in the product file. Element *sigma0_time_utc(100, 120)* records the time of acquisition of that same footprint.

The third and fastest moving index in the Sigma0 Slice Group represents one of the slice measures within each sigma0 footprint. The nominal number of slices in each sigma0 is 11. Slices are numbered based relative to slant range. The slices with a smaller slant range, in other words, those slices that are slightly closer to the spacecraft at time of measurement, have smaller indices. Slices with a larger slant range, in other words, those slices farther from the spacecraft at the time of measurement, have larger indices. Thus, element

slice_sigma0_hh(2,100,120) contains the horizontally co-polarized normalized radar cross section of the slice with the second smallest slant range within the 100th footprint measured in the 120th Antenna Scan in the product file. Element *slice_kp_hh(2,100,120)* records the normalized standard deviation of the same sigma0 measure.

4.2 Data Volume Estimates

Due to limits in communication bandwidth, complex rules dictate when synthetic aperture radar data are downlinked to the ground and subsequently processed into data products. Documentation of the L1B_S0_LoRes discusses these rules and how they impact data volume of that product.

The L1B_S0_LoRes product does not use or contain any of the synthetic aperture data. Thus, the complex downlink rules have no impact on the size of the typical L1B_S0_LoRes product.

The three main determiners of the size of the L1B_S0_LoRes data product size are the antenna rotation rate, the radar pulse repetition interval (PRI) and the number of slices in each whole σ_0 . Each PRI represents a single high resolution synthetic aperture radar pulse. Each set of 48 PRIs constitutes a low resolution instance. The antenna rotation rate may vary from 13 rpm to 14.6 rpm. The PRI rate varies from approximately 2648 Hz to 3141 Hz. The nominal number of slices in each σ_0 is 11.

Table 7 below estimates the maximum uncompressed product volume based on an Antenna Rotation Rate of 14.6 rpm and a PRI of 3141 Hz. The likely overall uncompressed volume of the L1B_S0_LoRes data product is likely to be 5% to 10% smaller.

Table 7: Data Volume Estimates for Data Acquired at 06:00 Local Time

Group	Number of Entries	Bytes Per Entry	Maximum Total Volume (MBytes)
Level 1B S0 LoRes Metadata	1	10000	0.010
XML Version of ISO Metadata	1	124000	0.124
Spacecraft Data Group	719	106	0.076

Group	Number of Entries	Bytes Per Entry	Maximum Total Volume (MBytes)
Sigma0 Data Group	193411	282	54.542
Sigma0 Slice Data Group	193411	2420	468.055
L1B S0 LoRes Product			522.806

4.3 SMAP Level 1B Radar Product File Names

SMAP L1B_S0_LoRes data product file names must conform to the following convention:

SMAP_L1B_S0_LoRes_[Orbit Number]_[A|D]_[First Date/Time Stamp]_[Composite Release ID]_[Product Counter].[extension]

The outline below describes the content of each field in the file naming convention:

Orbit Number – The sequential number of the orbit that the SMAP spacecraft flew when the data in the associated product were acquired. Orbit 0 will begin at launch. The orbit number must occupy five digits. Orbit numbers that are smaller than 10000 will appear with leading zeroes.

The Half Orbit Designator - SMAP divides orbits into two distinct parts. Division of half orbits takes place at the northernmost and southernmost point on the spacecraft path. Half orbits where the spacecraft moves from North to South are *descending* half orbits. Local time for measurements acquired during a *descending* half orbit is approximately 6 AM. The character “D” appears as the Half Orbit Designator in the file names of products that contain data representing *descending* half orbits. Half orbits where the spacecraft moves from South to North are classified as *ascending* half orbits. Local time for measurements acquired during an *ascending* half orbit is approximately 6 PM. The character “A” appears as the Half Orbit Designator in the file names of products that contain data represent *ascending* half orbits.

First Date/Time Stamp – The date/time stamp of the first data element that appears in the product. Date/time stamps in SMAP file names are always recorded in Universal Coordinated Time (UTC). Date/time stamps conform to the following convention:

July 20, 2015

SMAP L1B_S0_LoRes Product Specification

YYYYMMDDThhmmss

where:

YYYY is the calendar year. The full calendar year must appear in the file name.

MM designates the month of the year. The month designator always occupies two digits. Months that can be represented with fewer than two digits must employ a leading zero.

DD designates the day of the month. The day designator always occupies two digits. Days of the month that can be represented with fewer than two digits must employ a leading zero.

T delineates the date from the time, and is a required character in all time stamps in product names.

hh designates the hour of the day on a 24 hour clock in UTC. The hour designator always occupies two digits. Hours that can be represented with fewer than two digits must employ a leading zero.

mm designates the minute of the hour in UTC. The minute designator always occupies two digits. Minutes that can be represented with fewer than two digits must employ leading zeroes.

ss designates the truncated second of the minute in UTC. Fractional second specification is not necessary in file names. The second designator always occupies two digits. Seconds that can be represented with fewer than two digits must employ leading zeroes.

Composite Release ID – The Composite Release ID incorporates changes to any processing condition that might impact product results. The format of the Composite Release ID is as follows:

"R"	The character "R" always precedes this identifier
Launch indicator	Distinguishes between pre-launch or pre-instrument commissioned data and data generated under mission operation conditions. A launch indicator of "0" implies the data are simulated or acquired under early mission conditions that exempt the content from mission requirements. A launch indicator of "1" implies the data are acquired by the instrument at or after the time of instrument commissioning, and must therefore meet mission requirements.
Major ID	One digit that indicates major releases. Major changes in algorithm or processing approach will generate an update to this identifier.

July 20, 2015

SMAP L1B_S0_LoRes Product Specification

Minor ID Three digits that indicate minor releases. Any change to any component that impacts data processing, such as algorithm, software or parameters will lead to a change in this identifier.

Product Counter – Files that represent the same half orbit of any particular product type may be generated multiple times over the life of the mission. This counter tracks the number of times that a particular product type for a specific half orbit was generated. The system assigns the first instance of a file that represents a half orbit of a particular product type with a Product Counter of 001. The system assigns each subsequent instance of the same half orbit and same product type with the next consecutive integer. The Product Counter always occupies three digits. Product Counters that do not require three digits contain leading zeroes.

Extension – The extension for all SMAP L1B_S0_LoRes data products is “h5”. That extension indicates that the product contents are in HDF5 format. The SMAP SDS will generate a QA file with every data granule. The QA file contains statistical information that will enable users to better assess the quality of the associated granule. QA products bear exactly the same name as the products that they represent. The only difference in names is the extension. The extension for all QA products is “.qa”.

Example File Names – Based on the above standard, the following name describes a simulated data product from pre-launch release 5 of the Radar Level 1B S0_LoRes data product that is labeled to cover the ascending half of orbit 507. The first data point acquired 14:52:06 UTC on February 3, 2015. The file represents the second time a Radar L1B S0_LoRes product was generated for the ascending half of orbit 507:

SMAP_L1B_S0_LoRes_00507_A_20150203T145206_ R05001_002 h5

The name of the QA product that assesses the output of the above L1B_S0_LoRes granule would be:

SMAP_L1B_S0_LoRes_00934_A_20150203T145206_ R04001_002 qa

4.4 L1B_S0_LoRes Product Metadata

Complete listings on product Metadata need to be done.

As mentioned in section 4.1.2, the metadata elements in the Level 1B S0_LoRes product appear in two forms.

One form appears in two specific HDF Attributes within the Metadata Group. The content of the first of these two HDF Attributes is the complete set of series metadata. The series metadata apply to all L1B_S0_LoRes files in a SMAP mission release. The content of the second HDF Attribute is the complete set of dataset metadata. The dataset metadata are specific to each product file. Combined, these two Attributes represent all of the metadata associated with the L1B_S0_LoRes product. The content of these Attributes conforms to the ISO 19115-2 models

The second form of the metadata appears in a set of HDF5 groups under the Metadata Group. Each of these HDF5 Groups represents one of the major classes in the ISO structure. These groups contain a set of HDF5 attributes. Each HDF5 Attribute represents a specific ISO attribute of the associated ISO class. Although this representation inherits design from the ISO model, it does not completely conform to the model. In many cases, the names of the HDF5 Attributes match those used in the ISO model. In some situations, names were changed to provide greater clarity to SMAP users who are not familiar with the ISO model. Furthermore, to ease metadata searches, the structure of Groups within Groups was limited to four levels.

In addition, the Metadata group includes two attributes that contain MD5 checksums. These two checksum attributes specify the size of the two ISO metadata sets expressed in XML. Thus, *attribute iso_19139_dataset_xml_md5* contains the MD5 checksum of the contents of element *iso_19139_dataset_xml*. Likewise, attribute *iso_19139_series_xml_md5* contains the MD5 checksum of the contents of element *iso_19139_series_xml*.

Table 8 describes the subgroups of the Metadata group, and the attributes within each group. The first column of table 8 specifies a major class in the ISO 19115 metadata model. The second column provides the name of the HDF5 Group under “/Metadata” where attributes associated with the corresponding class will appear. The third column lists the names of the subgroups and attributes where specific metadata values appear. The fourth column provides valid values for each

element. Constant values appear with no diacritical marks. Variable values are encapsulated by brackets <>. All of the metadata elements that appear in table 8 should also appear in every Level 1B_S0_LoRes Product file.

Table 8: Granule Level Metadata in the L1B_S0_LoRes Product

ISO Major Class	SMAP HDF5 Metadata SubGroup	Subgroup/Attribute in SMAP HDF5	Valid Values
DQ_DataQuality	DataQuality	Scope	sigma0_hh, sigma0_hv, sigma0_vh, sigma0_vv
		CompletenessOmission/evaluationMethodType	directInternal
		CompletenessOmission/measureDescription	Percent of the radar normalized cross section measurements that appear in the product relative to the expected number of cross section measurements for the corresponding half orbit.
		CompletenessOmission/nameOfMeasure	Percent of Missing Data
		CompletenessOmission/value	<A measure between 0 and 100>
		CompletenessOmission/unitOfMeasure	Percent
		RFICompletenessOmission/evaluationMethodType	directInternal

		RFICompletenessOmission/measureDescription	Percent of grid cells where RFI was detected in the backscatter measure.
		RFICompletenessOmission/nameOfMeasure	Percent of Data Missing due to Radio Frequency Interference (RFI)
		RFICompletenessOmission/value	<A measure between 0 and 100>
		RFICompletenessOmission/unitOfMeasure	Percent
		domainConsistency/evaluationMethodType	directInternal
		DomainConsistency/measureDescription	Percent of sigma0 measures in the data product that fall within a predefined acceptable range of measure.
		DomainConsistency/nameOfMeasure	Percent of Sigma0s that are within the Acceptable Range.
		DomainConsistency/value	<A measure between 0 and 100>
		DomainConsistency/unitOfMeasure	Percent
EX_Extent	Extent	description	The SMAP spacecraft continuously downlinks real aperture radar data. Thus, unlike the synthetic aperture data, SMAP real aperture data appears over the entire 1000 km wide half orbit swath.
		polygonPosList	<A list of latitude and longitude ordered pairs that specify the

			vertices of a polygon that outlines the data found in the product. Vertices appear in clockwise order. Given the order of the vertices, the interior of the polygon is always to the right. >
		rangeBeginningDateTime	<Character string that indicates the date and time of the initial data element in the product>
		rangeEndingDateTime	<Character string that indicates the date and time of the final data element in the product.>
LI_Lineage/LE_ProcessStep	ProcessStep	processor	Soil Moisture Active Passive (SMAP) Mission Science Data System (SDS) Operations Facility
		stepDateTime	< A character string that specifies the date and the time when the product was generated.>
		processDescription	Converts instrument telemetry into a data set that contains horizontally polarized, vertically polarized and cross polarized normalized radar cross sections measures for each discrete real aperture footprint acquired during a given half orbit. The process also provides measures for slices of the footprints, where slice divisions run perpendicular to the projection of the slant range on the Earth's surface.

		identifier	L1B_S0_LORES_SPS
		SWVersionID	<A software version identifier that runs from 001 to 999>
		softwareDate	<A date stamp that specifies when software used to generate this product was released.>
		softwareTitle	L1B S0 LoRes SPS
		documentation	<A reference to software description document.>
		documentVersion	<Version identifier for the software description document.>
		documentDate	<Release date for the software description document.>
		runTimeParameters	<Specify any run time parameters if they were used.>
		RFThreshold	<A threshold the algorithm uses to specify whether a particular measure was contaminated by Radio Frequency Interference.>
		longTermCalibrationFactor_hh	<The long term calibration factor that was used to process the data that were transmitted and received in the horizontal polarization channel.>

		longTermCalibrationFactor_vv	<The long term calibration factor that was used to process the data that were transmitted and received in the vertical polarization channel.>
		longTermCalibrationFactor_vh	<The long term calibration factor that was used to process the data that were transmitted from the horizontal polarization channel and received in the vertical polarization channel.>
		longTermCalibrationFactor_hv	<The long term calibration factor that was used to process the data that were transmitted from the vertical polarization channel and received in the horizontal polarization channel.>
		timeVariableEpoch	J2000
		epochJulianDate	2451545.00
		epochUTCDateTime	2000-01-01T11:58:55.816Z
		parameterVersionID	<Identifier that specifies the current version of processing parameters. Value runs from 001 to 999.>
		algorithmTitle	Soil Moisture Active Passive (SMAP) Real Aperture Radar processing algorithm
		algorithmVersionID	<Identifier that specifies the current algorithm version. Value runs from

SMAP L1B_S0_LoRes Product Specification

			001 to 999>
		algorithmDate	<Date associated with current version of the algorithm.>
		algorithmDescription	The L1B S0 LoRes algorithm begins processing low resolution data that were averaged over range bins. Each range bin corresponds to a Block Floating Point Quantizer (BFPQ) block in the high resolution data. The L1B S0 LoRes processes data in time order. Major functions apply calibration, incorporate geolocation and implement noise subtraction. The algorithm flags for RFI, but does not apply a correction when RFI is detected.
		ATBDTitle	Soil Moisture Active Passive (SMAP) L1B_S0_LoRes/L1C_S0_HiRes Algorithm Theoretical Basis Document (ATBD).
		ATBDDate	<Time stamp that specifies the release date of the ATBD>
		ATBDVersion	<Version identifier for the ATBD.>
LI_Lineage/LE_Source	L1A_Radar,Antenna Azimuth, Attitude, Calibration Long Term	description	<Description of each of the input files used to generate the L1B S0 LoRes Data product.>

SMAP L1B_S0_LoRes Product Specification

	HiRes, Calibration Long Term LoRes, CalibrationShort Term, DEM, Ephemeris. LoRes External Targets, NCEPSeaSurfaceWinds, NOAA SigWaveHeight, OceanModel, Radar Antenna Pattern, L1BAdHoc, Spacecraft Clock UTC, Total Electron Content ¹	filename	<Complete file name of the input data product>
		creationDate	<A date stamp that specifies when the input data product was generated.>
		version	<The SMAP Composite Version ID associated with the input data product.>
		identifier	<The short name associated with the product. This field appears only for the Lineage class that describes the L1A_Radar product. >
		DOI	<A digital object identifier associated with the product. This field appears only for the Lineage class that describes the L1A_Radar product.>
DS_Dataset/MD_DataIdentification	DataSetIdentification	creationDate	<Date when the L1B_S0_LoRes data product file was created>
		CompositeReleaseID	<SMAP Composite Release ID associated with this data product – See section 4.3>
		filename	<Name of the L1B_S0_LoRes output data file.>
		originatorOrganizationName	Jet Propulsion Laboratory

SMAP L1B_S0_LoRes Product Specification

		shortName	SPL1BS0
		UUID	<A universally unique identifier for each data granule.>
		ECSVersionID	<Identifier that specifies major version delivered to ECS. Value runs from 001 to 999.>
		SMAPShortName	L1B_S0_LoRes
		abstract	Time ordered calibrated normalized real aperture radar cross section measures in representative Earth footprints with 40 km by 6 km resolution.
		purpose	The SMAP L1B radar data product delivers the real aperture radar backscatter measurements. These measures do not provide sufficiently high resolution to meet SMAP soil moisture retrieval requirements. Since real aperture data are not so voluminous, the SMAP spacecraft downlinks these data for all locations on the Earth's surface, providing users with a means to use SMAP radar data in locations that are not required for soil moisture retrieval.
		credit	The software that generates the Level 1B S0 LoRes product and the

			data system that automates its production were designed and implemented at the Jet Propulsion Laboratory, California Institute of Technology in Pasadena, California.
		status	onGoing
		spatialRepresentationType	vector
		language	eng
		characterSet	utf8
		topicCategory	geoscientificInformation
	QADatasetIdentification	filename	<The name of QA product.>
		creationDate	<The date that the QA product that accompanies the L1B_S0_LoRes data granule was generated.>
		abstract	An ASCII product that contains statistical information on data product results. These statistics enable data producers and users to assess the quality of the data in the data product granule.
DS_Series/MD_DataIdentification	SeriesIdentification	revisionDate	<Date and time of the software release that was used to generate this data product.>

SMAP L1B_S0_LoRes Product Specification

		CompositeReleaseID	<SMAP Composite Release ID that identifies the release used to generate this data product – See section 4.3>
		longName	SMAP L1B Radar Half-Orbit Time-Ordered Low-Resolution σ_0 Data
		shortName	SPL1BS0
		identifier_product_DOI	http://dx.doi.org/10.5067/UCZC0LUSQQI
		ECSVersionID	<Identifier that specifies major version delivered to ECS. Value runs from 001 to 999.>
		resourceProviderOrganizationName	National Aeronautics and Space Administration
		Abstract	Time ordered calibrated normalized real aperture radar cross section measures in representative Earth footprints with 40 km by 6 km resolution.
		Purpose	The SMAP L1B radar data product delivers the real aperture radar backscatter measurements. These measures do not provide sufficiently high resolution to meet SMAP soil

			moisture retrieval requirements. Since real aperture data are not so voluminous, the SMAP spacecraft downlinks these data for all locations on the Earth's surface, providing users with a means to use SMAP radar data in locations that are not required for soil moisture retrieval.
		Credit	The software that generates the Level 1B S0 LoRes product and the data system that automates its production were designed and implemented at the Jet Propulsion Laboratory, California Institute of Technology in Pasadena, California.
		status	onGoing
		spatialRepresentationType	vector
		characterSet	utf8
		Language	eng
		topicCategory	geoscientificInformation
		pointOfContact	Alaska Satellite Facility, Fairbanks, Alaska
		Mission	Soil Moisture Active Passive (SMAP)
		maintenanceAndUpdateFrequency	asNeeded

		maintenanceDate	<Specifies a date when the next update to this product might be anticipated>
		otherCitationDetails	The launch ready Release of the SMAP Level 1B Radar (L1B_S0_LoRes) Science Processing Software.
		Format	HDF5
		formatVersion	1.8.13
	ProductSpecificationDocument	language	eng
		characterSet	utf8
		publicationDate	<Date of publication of the Product Specification Document>
		edition	<Edition identifier for the Product Specification Document>
		Title	Soil Moisture Active Passive Mission L1B_S0_LoRes Product Specification Document
		SMAPShortName	L1B_S0_LoRes
MD_GridSpatialRepresentation	GridSpatialRepresentation	numberOfDimensions	2
		cellGeometry	point

		transformationParameterAvailability	0 (implies not available)
		time/dimensionSize	<The number of antenna scans in the corresponding product. Each antenna scan represents the time period for the SMAP antenna to rotate once. Should vary between 640 to 720.>
		time/resolution	954 nanoseconds (The time represented by each spacecraft tick.)
		sample/dimensionSize	<The number of sigma0s that can appear within a given antenna scan. Under nominal conditions, this number will never exceed 301. >
		sample/resolution	1
		controlPointAvailability	0 (implies not available)
		pointInPixel	Center
MD_AcquisitionInformation	AcquisitionInformation	platform/antennaRotationRate	14.6 rpm OR 13.0 rpm
		platformDocument/publicationDate	<The date of publication of the document that describes the SMAP platform, if available to the general public>
		platformDocument/edition	<The edition of publication of the document that describes the SMAP

			platform, if available to the general public.>
		platformDocument/title	<The title of the publication of the document that describes the SMAP platform, if available to the general public.>
		platform/description	The SMAP observatory houses an L-band radiometer that operates at 1.414 GHz and an L-band radar that operates at 1.225 GHz. The instruments share a rotating reflector antenna with a 6 meter aperture that scans over a 1000 km swath. The bus is a 3 axis stabilized spacecraft that provides momentum compensation for the rotating antenna.
		platform/identifier	SMAP
		radarDocument/publicationDate	<The date of publication of the document that describes the SMAP radar instrument, if available to the general public.>
		radarDocument/edition	<The edition of publication of the document that describes the SMAP radar instrument, if available to the general public.>
		radarDocument/title	<The title of the publication of the document that describes the SMAP

			radar instrument, if available to the general public.>
		radar/description	The SMAP radar instrument employs an L-band conically scanned system and SAR processing techniques to achieve moderate resolution (1 km) backscatter measurements over a very wide 1000 km swath.
		radar/identifier	SMAP SAR
		radar/type	L-band Synthetic Aperture Radar
		radiometerDocument/publicationDate	<The date of publication of the document that describes the SMAP radiometer instrument, if available to the general public.>
		radiometerDocument/edition	<The edition of publication of the document that describes the SMAP radiometer instrument, if available to the general public.>
		radiometerDocument/title	<The title of the publication of the document that describes the SMAP radiometer instrument, if available to the general public.>
		radiometer/description	The SMAP L-band Radiometer records V-pol, H-pol, 3 rd and 4 th Stokes brightness temperatures at 40 km resolution at 4.3 Megabits per second with accuracies of 1.3 Kelvin

			or better.
		radiometer/identifier	SMAP RAD
		radiometer/type	L-band Radiometer
SD_OrbitMeasuredLocation	OrbitMeasuredLocation	argumentOfPerigee	<The angle in the satellite's orbit plane between the point of perigee and ascending node. The angle is measured in the direction of spacecraft motion.>
		cycleNumber	<The SMAP satellite flies in a cycle that repeats after 117 orbits. This element specifies the cycle of orbits when the data were taken. First cycle is assigned the number 1.>
		eccentricity	<The eccentricity of the satellite orbit.>
		epoch	<The effective time of the data in the OrbitMeasuredLocation class. This may be identical to the equatorCrossingDateTime.>
		equatorCrossingDateTime	<A time stamp that specifies the date and time of ascending node crossing for the current orbit.>
		equatorCrossingLongitude	<The longitude of the ascending node crossing for the current orbit.>

		inclination	<The angle between the spacecraft's orbital plane and the Earth's equatorial plane. An angle greater than 90 degrees indicates a orbit retrograde path.>
		meanMotion	<The constant angular speed that would be required for a body travelling in an undisturbed elliptical orbit with the specified semi-major axis to complete one revolution in the actual orbital period, expressed as a number of revolutions per day.>
		orbitDirection	<SMAP Level 1 and Level 2 products appear in half orbit granules. This element provides direction of orbital path relative to equatorial plane. Values are "ascending" or "descending".>
		halfOrbitStartDateTime	<A time stamp that specifies the date and time of the instant the spacecraft crosses either the southernmost point or the northernmost point in its path, marking the beginning of the half orbit.>
		halfOrbitStopDateTime	<A time stamp that specifies the date and time of the instant the spacecraft crosses either the southernmost point or the northernmost point in its path, marking the end of the half

			orbit.>
		orbitPathNumber	< The SMAP satellite flies in a cycle the repeats after 117 orbits. This element specifies which of the 117 possible paths the spacecraft flew when the data in the file were acquired. The orbitPathNumber varies from 1 to 117.>
		orbitPeriod	<Time required to complete a the spacecraft orbit.>
		referenceCRS	<A description of the coordinate reference system used to describe spacecraft orbital data.>
		revNumber	<The count of orbits from beginning of mission to the orbit that the spacecraft flew when the data in the file were acquired. Orbit zero begins at launch and extends until the spacecraft crosses the southernmost point in its path for the first time. Orbit one commences at that instant.>
		rightAscensionAscendingNode	<The angle eastward on the equatorial plan from the vernal equinox to the orbit ascending node.>
		semiMajorAxis	<The length of the semi-major axis of

			the spacecraft orbit.>
--	--	--	------------------------

¹ The metadata will allocate a group for each input data set that requires provenance tracking. The most critical ones listed in this document are those that are likely to vary from one orbit granule to the next. The metadata will track and list additional files for user information.

4.5 Data Structure

4.5.1 Spacecraft Data Group

The Spacecraft Data Group contains elements that specify either geometric or geographic information that are representative of an entire Antenna Rotation. The SMAP antenna rotates at a constant rate that varies between 13 rpms and 14.6 rpms. All of the product elements in the Spacecraft Data Group are stored in a single HDF5 Group named `/Spacecraft_Data`. A distinct HDF5 Dataset stores each data element. The name of each Dataset object matches the data element that it stores. Table 9 lists all of the elements in the Spacecraft Data Group.

All the HDF5 Datasets in the Spacecraft Data Group have the `AntennaScan_Array` shape. The `AntennaScan_Array` shape describes a one-dimensional array, where each array element represents one specific instance of a single antenna rotation. Thus, array element `x_pos(212)` lists the representative spacecraft position in the x dimension of the Earth Centered Rotating (ECR) coordinate system, array element `yaw(212)` lists the representative spacecraft yaw, and array element `sc_geodetic_alt_ellipsoid(212)` lists the representative spacecraft altitude above the Earth ellipsoid at the instant when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system within the same antenna rotation. This is equivalent to the instant when antenna azimuth is zero degrees. When the antenna azimuth is zero degrees, the direction of the antenna look is very nearly the same as the direction of spacecraft motion.

Table 9: The Spacecraft Data Group

Element Name	Type	Shape	Valid_Min	Valid_Max	Units
antenna_scan_time	float64	AntennaScan_Array	465156000	946000000	seconds
antenna_scan_time_utc	char	AntennaScan_Array	n/a	n/a	n/a
antenna_scan_mode_flag	uint16	AntennaScan_Array	n/a	n/a	n/a
antenna_scan_qual_flag	uint16	AntennaScan_Array	n/a	n/a	n/a

Element Name	Type	Shape	Valid_Min	Valid_Max	Units
sc_nadir_lat	float32	AntennaScan_Array	-90	90	degrees
sc_nadir_lon	float32	AntennaScan_Array	-180	180	degrees
declination	float32	AntennaScan_Array	-90.00	90.000	degrees
right_ascension	float32	AntennaScan_Array	0.000	359.999	degrees
sc_nadir_angle	float32	AntennaScan_Array	0.000	180.000	degrees
sc_geodetic_alt_ellipsoid	float32	AntennaScan_Array	650000	900000	meters
sc_alongtrack_velocity	float32	AntennaScan_Array	-8000	8000	m/sec
sc_radial_velocity	float32	AntennaScan_Array	-8000	8000	m/sec
x_pos	float32	AntennaScan_Array	-9999999	9999999	meters
y_pos	float32	AntennaScan_Array	-9999999	9999999	meters
z_pos	float32	AntennaScan_Array	-9999999	9999999	meters
x_vel	float32	AntennaScan_Array	-8000	8000	meters/sec
y_vel	float32	AntennaScan_Array	-8000	8000	meters/sec
z_vel	float32	AntennaScan_Array	-8000	8000	meters/sec
roll	float32	AntennaScan_Array	-3	3	degrees

Element Name	Type	Shape	Valid_Min	Valid_Max	Units
pitch	float32	AntennaScan_Array	-3	3	degrees
yaw	float32	AntennaScan_Array	-3	3	degrees
sigma0s_per_scan	uint16	AntennaScan_Array	0	301	n/a

4.5.2 Sigma0 Data Group

The Sigma0 Data Group contains a representative normalized radar cross section (σ_0) data for each real aperture footprint recorded in the L1B S0 LoRes data product. In addition to σ_0 measurements, the Sigma0 Data group provides the location as well as geometry and quality information for each pixel in the swath grid. Table 10 lists all of the elements in the Sigma0 Data Group.

All of the product elements in the Sigma0 Data Group data are stored in a single HDF5 Group called “/Sigma0_Data”. A distinct HDF5 Dataset stores each data element. The name of each Dataset object matches the data element that it stores.

All of the HDF5 Datasets in the Sigma0 Data Group store two-dimensional arrays.

For all Datasets in the Sigma0 Data Group, the dimension that contains the slowest moving indices represents one specific instance of a rotation of the SMAP antenna. SMAP data reference each rotation of the antenna as an Antenna Scan. All data elements that share the same index in this dimension were recorded within the same antenna rotation. The dimension that contains the faster moving indices represents each individual real aperture σ_0 footprint. Thus, *center_lat_v(251,250)* and *center_lon_v(251,250)* contain respectively the latitude and longitude of the center of the instantaneous field of view of the 251st footprint transmitted from the vertical polarization channel in the 250th antenna scan listed in the data product. The representative vertically copolarized σ_0 for the same footprint appears in *sigma0_vv(251,250)*. The azimuth of the instrument boresight projected onto the Earth’s surface relative to North appears in *earth_boresight_azimuth(251,250)*.

Table 10: The Sigma0 Data Group

Element Name	Type	Shape	Valid_Min	Valid_Max	Units
--------------	------	-------	-----------	-----------	-------

sigma0_time_seconds	float64	AntennaScan_Sigma0_Array			seconds
sigma0_time_utc	char	AntennaScan_Sigma0_Array			n/a
center_lat_h	float32	AntennaScan_Sigma0_Array	-90	90	degrees
center_lon_h	float32	AntennaScan_Sigma0_Array	-180	180	degrees
center_lat_v	float32	AntennaScan_Sigma0_Array	-90	90	degrees
center_lon_v	float32	AntennaScan_Sigma0_Array	-180	180	degrees
cylindrical_grid_row_index_h	float32	AntennaScan_Sigma0_Array	0	14616	n/a
cylindrical_grid_column_index_h	float32	AntennaScan_Sigma0_Array	0	34704	n/a
cylindrical_grid_row_index_v	float32	AntennaScan_Sigma0_Array	0	14616	n/a
cylindrical_grid_column_index_v	float32	AntennaScan_Sigma0_Array	0	34704	n/a
polar_grid_row_index_h	float32	AntennaScan_Sigma0_Array	0	18000	n/a
polar_grid_column_index_h	float32	AntennaScan_Sigma0_Array	0	18000	n/a
polar_grid_row_index_v	float32	AntennaScan_Sigma0_Array	0	18000	n/a

polar_grid_column_index_v	float32	AntennaScan_Sigma0_Array	0	18000	n/a
center_altitude	float32	AntennaScan_Sigma0_Array	-100	9000	meters
center_altitude_std_dev	float32	AntennaScan_Sigma0_Array	0	10000	meters
center_gradient	float32	AntennaScan_Sigma0_Array	0	90	degrees
slant_range	float32	AntennaScan_Sigma0_Array	700000	1100000	meters
antenna_scan_angle	float32	AntennaScan_Sigma0_Array	0	360	degrees
antenna_look_angle	float32	AntennaScan_Sigma0_Array	0	180	degrees
earth_boresight_azimuth	float32	AntennaScan_Sigma0_Array	0	360	degrees
earth_boresight_incidence_h	float32	AntennaScan_Sigma0_Array	0.0	90.0	degrees
earth_boresight_incidence_v	float32	AntennaScan_Sigma0_Array	0.0	90.0	degrees
footprint_area	float32	AntennaScan_Sigma0_Array	0.0	1.225e9	meters**2
sigma0_mode_flag	uint16	AntennaScan_Sigma0_Array	n/a	n/a	n/a
sigma0_qual_flag_hh	uint16	AntennaScan_Sigma0_Array	n/a	n/a	n/a

sigma0_qual_flag_vv	uint16	AntennaScan_Sigma0_Array	n/a	n/a	n/a
sigma0_qual_flag_hv	uint16	AntennaScan_Sigma0_Array	n/a	n/a	n/a
sigma0_qual_flag_vh	uint16	AntennaScan_Sigma0_Array	n/a	n/a	n/a
sigma0_hh	float32	AntennaScan_Sigma0_Array	-0.01	10	n/a
sigma0_vv	float32	AntennaScan_Sigma0_Array	-0.01	10	n/a
sigma0_hv	float32	AntennaScan_Sigma0_Array	-0.01	10	n/a
sigma0_vh	float32	AntennaScan_Sigma0_Array	-0.01	10	n/a
sigma0_hh_noise	float32	AntennaScan_Sigma0_Array	-0.01	10	n/a
sigma0_vv_noise	float32	AntennaScan_Sigma0_Array	-0.01	10	n/a
sigma0_hv_noise	float32	AntennaScan_Sigma0_Array	-0.01	10	n/a
sigma0_vh_noise	float32	AntennaScan_Sigma0_Array	-0.01	10	n/a
kp_hh	float32	AntennaScan_Sigma0_Array	0.00	1.00	n/a
kp_vv	float32	AntennaScan_Sigma0_Array	0.00	1.00	n/a
kp_hv	float32	AntennaScan_Sigma0_Array	0.00	1.00	n/a
kp_vh	float32	AntennaScan_Sigma0_Array	0.00	1.00	n/a

x_factor_hh	float32	AntennaScan_Sigma0_Array	0.00	1.0e+20	n/a
x_factor_vv	float32	AntennaScan_Sigma0_Array	0.00	1.0e+20	n/a
x_factor_hv	float32	AntennaScan_Sigma0_Array	0.00	1.0e+20	n/a
x_factor_vh	float32	AntennaScan_Sigma0_Array	0.00	1.0e+20	n/a
selected_frequency	float32	AntennaScan_Sigma0_Array	1218.75	1296.25	MHz
faraday_rotation_angle	float32	AntennaScan_Sigma0_Array	-90.0	90.0	degrees
faraday_rotation_correction_hh	float32	AntennaScan_Sigma0_Array	0	10	n/a
faraday_rotation_correction_vv	float32	AntennaScan_Sigma0_Array	0	10	n/a
faraday_rotation_correction_hv	float32	AntennaScan_Sigma0_Array	0	10	n/a
faraday_rotation_correction_vh	float32	AntennaScan_Sigma0_Array	0	10	n/a
gain_correction_factor_hh	float32	AntennaScan_Sigma0_Array	0.00	10.00	n/a
gain_correction_factor_vv	float32	AntennaScan_Sigma0_Array	0.00	10.00	n/a
gain_correction_factor_vh	float32	AntennaScan_Sigma0_Array	0.00	10.00	n/a
gain_correction_factor_hv	float32	AntennaScan_Sigma0_Array	0.00	10.00	n/a
polarization_rotation_angle	float32	AntennaScan_Sigma0_Array	-90.0	90.0	degrees

snr_hh	float32	AntennaScan_Sigma0_Array	0.001	1000.0	n/a
snr_vv	float32	AntennaScan_Sigma0_Array	0.001	1000.0	n/a
snr_hv	float32	AntennaScan_Sigma0_Array	0.001	1000.0	n/a
snr_vh	float32	AntennaScan_Sigma0_Array	0.001	1000.0	n/a
sigma0_spatial_resolution	float32	AntennaScan_Sigma0_Array	100.0	35000.0	meters
wind_speed	float32	AntennaScan_Sigma0_Array	0.0	75.0	meters/ second
wind_direction	float32	AntennaScan_Sigma0_Array	0.0	359.99	degrees
significant_wave_height	float32	AntennaScan_Sigma0_Array	0.0	15.0	meters
sigma0_hh_wind_model	float32	AntennaScan_Sigma0_Array	-0.01	10	n/a
sigma0_hv_wind_model	float32	AntennaScan_Sigma0_Array	-0.01	10	n/a
sigma0_vh_wind_model	float32	AntennaScan_Sigma0_Array	-0.01	10	n/a
sigma0_vv_wind_model	float32	AntennaScan_Sigma0_Array	-0.01	10	n/a

4.5.3 Sigma0 Slice Data Group

The Sigma0 Slice Data Group contains slices of the representative normalized radar cross section (σ_0) data for each real aperture footprint recorded in the L1B_S0_LoRes data product. To determine slice boundaries, the L1B_S0_LoRes software generates a set of lines that fall within the limits of the radar field of view and run perpendicular to the slant range projected onto the surface of the Earth. The nominal L1B_S0_LoRes product employs 11 slices for each σ_0 . In addition to σ_0 measurements, the Sigma0 Slice Data group provides the location as well as geometry and quality information for each pixel in the swath grid. Table 11 lists all of the elements in the Sigma0 Slice Data Group.

All of the product elements in the Sigma0 Slice Group data are stored in a single HDF5 Group called “/Sigma0_Slice_Data”. A distinct HDF5 Dataset stores each data element. The name of each Dataset object matches the data element that it stores.

For all Datasets in the Sigma0 Slice Group, the dimension that contains the slowest moving indices represents one specific instance of a rotation of the SMAP antenna. SMAP data reference each rotation of the antenna as an Antenna Scan. All data elements that share the same index in this dimension were recorded within the same antenna rotation. The dimension that contains the next slowest moving indices represents each individual real aperture σ_0 footprint. For all three-dimensional arrays, the dimension with the third and fastest moving indices represents the individual slices. Slice numbers increase with increasing slant range. Thus, the slice with the smallest slant range has the smallest index. Likewise, the slice with the greatest slant range has the largest index. Thus, *slice_lat_h(450,75,3)* and *slice_lon_h(450,75,3)* contain respectively the latitude and longitude of the center of the instantaneous field of view of the slice transmitted from the horizontal polarization channel with the 3rd smallest slant range in the 75th footprint in the 450th antenna scan listed in the data product. The representative horizontally copolarized σ_0 for the same footprint appears in *slice_sigma0_hh(450,75,3)*. The signal to noise ratio associated with the same slice appears in *slice_snr_hh(450,75,3)*.

Table 11: The Sigma0 Slice Data Group

Element Name	Type	Shape	Valid_Min	Valid_Max	Units
slice_lat_h	float32	AntennaScan_Sigma0_Slice_Array	-90	90	degrees
slice_lon_h	float32	AntennaScan_Sigma0_Slice_Array	-180	180	degrees
slice_lat_v	float32	AntennaScan_Sigma0_Slice_Array	-90	90	degrees
slice_lon_v	float32	AntennaScan_Sigma0_Slice_Array	-180	180	degrees
slice_cylindrical_grid_row_index_h	float32	AntennaScan_Sigma0_Slice_Array	0	14616	n/a
slice_cylindrical_grid_column_index_h	float32	AntennaScan_Sigma0_Slice_Array	0	34704	n/a
slice_cylindrical_grid_row_index_v	float32	AntennaScan_Sigma0_Slice_Array	0	14616	n/a
slice_cylindrical_grid_column_index_v	float32	AntennaScan_Sigma0_Slice_Array	0	34704	n/a
slice_polar_grid_row_index_h	float32	AntennaScan_Sigma0_Slice_Array	0	18000	n/a
slice_polar_grid_column_index_h	float32	AntennaScan_Sigma0_Slice_Array	0	18000	n/a
slice_polar_grid_row_index_v	float32	AntennaScan_Sigma0_Slice_Array	0	18000	n/a

slice_polar_grid_column_index_v	float32	AntennaScan_Sigma0_Slice_Array	0	18000	n/a
slice_altitude	float32	AntennaScan_Sigma0_Slice_Array	-100	9000	meters
slice_altitude_std_dev	float32	AntennaScan_Sigma0_Slice_Array	0	10000	meters
slice_gradient	float32	AntennaScan_Sigma0_Slice_Array	0	90	degrees
slice_slant_range	float32	AntennaScan_Sigma0_Slice_Array	700000	1100000	meters
slice_earth_incidence_h	float32	AntennaScan_Sigma0_Slice_Array	0	90	degrees
slice_earth_incidence_v	float32	AntennaScan_Sigma0_Slice_Array	0	90	degrees
slice_area	float32	AntennaScan_Sigma0_Slice_Array	0.0	1.8e8	meters**2
slice_qual_flag_hh	uint16	AntennaScan_Sigma0_Slice_Array	n/a	n/a	n/a
slice_qual_flag_vv	uint16	AntennaScan_Sigma0_Slice_Array	n/a	n/a	n/a
slice_qual_flag_hv	uint16	AntennaScan_Sigma0_Slice_Array	n/a	n/a	n/a
slice_qual_flag_vh	uint16	AntennaScan_Sigma0_Slice_Array	n/a	n/a	n/a
slice_sigma0_hh	float32	AntennaScan_Sigma0_Slice_Array	-0.01	10	n/a

slice_sigma0_vv	float32	AntennaScan_Sigma0_Slice_Array	-0.01	10	n/a
slice_sigma0_hv	float32	AntennaScan_Sigma0_Slice_Array	-0.01	10	n/a
slice_sigma0_vh	float32	AntennaScan_Sigma0_Slice_Array	-0.01	10	n/a
slice_sigma0_hh_noise	float32	AntennaScan_Sigma0_Slice_Array	-0.01	10	n/a
slice_sigma0_vv_noise	float32	AntennaScan_Sigma0_Slice_Array	-0.01	10	n/a
slice_sigma0_hv_noise	float32	AntennaScan_Sigma0_Slice_Array	-0.01	10	n/a
slice_sigma0_vh_noise	float32	AntennaScan_Sigma0_Slice_Array	-0.01	10	n/a
slice_kp_hh	float32	AntennaScan_Sigma0_Slice_Array	0.00	1.00	n/a
slice_kp_vv	float32	AntennaScan_Sigma0_Slice_Array	0.00	1.00	n/a
slice_kp_hv	float32	AntennaScan_Sigma0_Slice_Array	0.00	1.00	n/a
slice_kp_vh	float32	AntennaScan_Sigma0_Slice_Array	0.00	1.00	n/a
slice_x_factor_hh	float32	AntennaScan_Sigma0_Slice_Array	0.00	1.0e+20	n/a
slice_x_factor_vv	float32	AntennaScan_Sigma0_Slice_Array	0.00	1.0e+20	n/a
slice_x_factor_hv	float32	AntennaScan_Sigma0_Slice_Array	0.00	1.0e+20	n/a

slice_x_factor_vh	float32	AntennaScan_Sigma0_Slice_Array	0.00	1.0e+20	n/a
slice_faraday_rotation_angle	float32	AntennaScan_Sigma0_Array	-90.0	90.0	degrees
slice_gain_correction_factor_hh	float32	AntennaScan_Sigma0_Slice_Array	0.0	10.00	n/a
slice_gain_correction_factor_vv	float32	AntennaScan_Sigma0_Slice_Array	0.0	10.00	n/a
slice_gain_correction_factor_hv	float32	AntennaScan_Sigma0_Slice_Array	0.0	10.00	n/a
slice_gain_correction_factor_vh	float32	AntennaScan_Sigma0_Slice_Array	0.0	10.00	n/a
slice_polarization_rotation_angle	float32	AntennaScan_Sigma0_Slice_Array	-90.0	90.0	degrees
slice_snr_hh	float32	AntennaScan_Sigma0_Slice_Array	0.001	1000.0	n/a
slice_snr_vv	float32	AntennaScan_Sigma0_Slice_Array	0.001	1000.0	n/a
slice_snr_hv	float32	AntennaScan_Sigma0_Slice_Array	0.001	1000.0	n/a
slice_snr_vh	float32	AntennaScan_Sigma0_Slice_Array	0.001	1000.0	n/a
slice_elevation_length	float32	AntennaScan_Sigma0_Slice_Array	2000.0	10000.0	meters
slice_azimuth_length	float32	AntennaScan_Sigma0_Slice_Array	15000.0	45000.0	meters
slice_wind_speed	float32	AntennaScan_Sigma0_Slice_Array	0.0	75.0	meters/ second
slice_wind_direction	float32	AntennaScan_Sigma0_Slice_Array	0.0	359.99	degrees

slice_significant_wave_height	float32	AntennaScan_Sigma0_Slice_Array	0.0	15.0	meters
slice_sigma0_hh_wind_model	float32	AntennaScan_Sigma0_Slice_Array	-0.01	10	n/a
slice_sigma0_hv_wind_model	float32	AntennaScan_Sigma0_Slice_Array	-0.01	10	n/a
slice_sigma0_vh_wind_model	float32	AntennaScan_Sigma0_Slice_Array	-0.01	10	n/a
slice_sigma0_vv_wind_model	float32	AntennaScan_Sigma0_Slice_Array	-0.01	10	n/a

4.6 Element Definitions

4.6.1 antenna_look_angle

The angle defined by the antenna boresight vector and the spacecraft nadir vector.

antenna_look_angle is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0
Valid_max: 180
Units: degrees

4.6.2 antenna_scan_angle

The angular position of the antenna boresight projected onto the X-Y plane of the spacecraft coordinate system. The *antenna_scan_angle* is zero when the antenna boresight aligns with the X axis of the spacecraft coordinate system. Angular measure increases as the antenna rotates counterclockwise. .

antenna_scan_angle is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0
Valid_max: 359.999
Units: degrees

4.6.3 antenna_scan_time

The time within each antenna scan when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system. Time values are counts of International System (SI) seconds based on the J2000 epoch in Ephemeris Time (ET). The J2000 epoch starting point is January 1, 2000 at 12:00 ET, which translates to January 1, 2000 at 11:58:55.816 Universal Coordinated Time (UTC).

antenna_scan_time is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type:	Float64
Group:	Spacecraft Data
Shape:	AntennaScan_Array
Valid_min:	465156000.0
Valid_max:	946000000.0
Units:	seconds

4.6.4 antenna_scan_time_utc

The Universal Coordinated Time (UTC) within each antenna scan when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system. Within each antenna rotational scan, the *antenna_scan_time_utc* records the same time instant as the *antenna_scan_time*. The *antenna_scan_time_utc* appears as an easily interpretable character string, while the *antenna_scan_time* is the count of Ephemeris Time (ET) International System (SI) seconds since 12:00 hours on January 1, 2000 Greenwich Mean Time.

The format of the *antenna_scan_time_utc* is YYYY-MM-DDThh:mm:ss.dddZ, where YYYY represents the calendar year, MM represents the month of the year and DD represents the day of the month. The character 'T' demarcates the date from the time. hh represents the hour in twenty-four hour time, mm represents the minutes, ss represents the seconds, and ddd represents thousandths of a second. The character 'Z' designates Greenwich Mean Time. All numerical fields must occupy the allotted space. If any numerical value does not require the allotted space to represent the appropriate number, the field that specifies the number must contain leading zeroes.

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

antenna_scan_time_utc is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: FixLenStr
String Length: 24 characters
Group: Spacecraft Data
Shape: AntennaScan_Array
Valid_min: '2014-10-31T00:00:00.000Z'
Valid_max: '2030-12-31T23:59:60.999Z'
Units: n/a

4.6.5 antenna_scan_mode_flag

Bit flags that indicate operational conditions for each antenna scan in the half orbit. Table 12 specifies the meaning of individual bits in the *antenna_scan_mode_flag*:

Table 12: The *antenna_scan_mode_flag*

Bits	Value	Interpretation
0		Instrument viewing mode
	0	Spacecraft antenna is positioned so that the SMAP instrument views locations on the Earth's surface over the entire antenna scan.
	1	Spacecraft antenna is positioned so that the SMAP instrument does not view the Earth over the entire antenna scan. During the associated scan, the SMAP spacecraft is either in maneuver, running a cold sky calibration or in a transition state.
1		Ephemeris Usage Flag
	0	Processing employed reconstructed ephemeris
	1	Processing employed predicted ephemeris
2-15		Undefined

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

antenna_scan_mode_flag is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: Uint16
Group: Spacecraft Data
Shape: AntennaScan_Array
Units: n/a

4.6.6 antenna_scan_qual_flag

Bit flags that indicate the quality of spacecraft position and orientation, or antenna azimuth data for each antenna scan in the half orbit. Table 13 specifies the meaning of individual bits in the *antenna_scan_qual_flag*:

Table 13: The *antenna_scan_qual_flag*

Bits	Value	Interpretation
0		Ephemeris Quality
	0	Quality and frequency of the ephemeris data is within acceptable range.
	1	Quality or frequency of the ephemeris data may not be adequate to yield a sufficiently accurate measure of spacecraft location to meet mission geolocation requirements.
1		Attitude Quality
	0	Quality and frequency of the attitude data is within acceptable range.
	1	Quality or frequency of the attitude data may not be adequate to interpolate a sufficiently accurate measure of spacecraft attitude to meet mission requirements.
2		Antenna Pointing Quality
	0	Quality and frequency of the antenna pointing data is within acceptable range.

Bits	Value	Interpretation
	1	Quality or frequency of the antenna pointing data may not be adequate to yield a sufficiently accurate position measure to meet mission geolocation requirements.
3-15		Undefined

antenna_scan_qual_flag is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: Uint16
Group: Spacecraft Data
Shape: AntennaScan_Array
Units: n/a

4.6.7 center_altitude

The representative altitude of the Earth's surface relative to sea level at the center of the sigma0 footprint.

center_altitude is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: -100.0
Valid_max: 9000.0
Units: meters

4.6.8 center_altitude_std_dev

The standard deviation of the altitude of the Earth's surface at the center of the sigma0 footprint.

center_altitude_std_dev is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 10000.0
Units: meters

4.6.9 center_gradient

The acute angle between the zenith vector and representative normal to the Earth's surface at the center of the sigma0 footprint.

center_gradient is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Group
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 90.0
Units: degrees

4.6.10 center_lat_h

The geodetic latitude of the center of each sigma0 footprint. The center location is equivalent to the geodetic latitude of the intersection of the antenna boresight vector and the Earth's surface.

This element applies exclusively for footprints that are based on radar signals that were transmitted in horizontal polarization. Thus, this index applies to all elements in the Sigma0 Group that have the character string "hh" or "vh" affixed to their name.

center_lat_h is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: -90
Valid_max: 90
Units: degrees

4.6.11 center_lat_v

The geodetic latitude of the center of each sigma0 footprint. The center location is equivalent to the geodetic latitude of the intersection of the antenna boresight vector and the Earth's surface.

This element applies exclusively for footprints that are based on radar signals that were transmitted in vertical polarization. Thus, this index applies to all elements in the Sigma0 Group that have the character string "vv" or "hv" affixed to their name.

center_lat_v is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: -90
Valid_max: 90
Units: degrees

4.6.12 center_lon_h

The longitude of the center of each sigma0 footprint. The center location is equivalent to the longitude of the intersection of the antenna boresight vector and the Earth's surface.

This element applies exclusively for footprints that are based on radar signals that were transmitted in horizontal polarization. Thus, this index applies to all elements in the Sigma0 Group that have the character string "hh" or "vh" affixed to their name.

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

center_lon_h is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: -180
Valid_max: 179.999
Units: degrees

4.6.13 center_lon_v

The longitude of the center of each sigma0 footprint. The center location is equivalent to the longitude of the intersection of the antenna boresight vector and the Earth's surface.

This element applies exclusively for footprints that are based on radar signals that were transmitted in vertical polarization. Thus, this index applies to all elements in the Sigma0 Group that have the character string "vv" or "hv" affixed to their name.

center_lon_v is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: -180
Valid_max: 179.999
Units: degrees

4.6.14 cylindrical_grid_row_index_h

The cylindrical Equal Area Scalable Earth (EASE) grid index in the latitudinal direction at the center the sigma0 footprint. The referenced cylindrical EASE grid has 1 km resolution and employs a reference latitude of 30°. To provide greater

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

precision, the Level 1B_S0_LoRes product provides the EASE grid index as a floating point number.

This element applies exclusively for footprints that are based on radar signals that were transmitted in horizontal polarization. Thus, this index applies to all elements in the Sigma0 Group that have the character string “hh” or “vh” affixed to their name.

cylindrical_grid_row_index_h is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Group
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 14616.0
Units: n/a

4.6.15 cylindrical_grid_row_index_v

The cylindrical Equal Area Scalable Earth (EASE) grid index in the latitudinal direction at the center the sigma0 footprint. The referenced cylindrical EASE grid has 1 km resolution and employs a reference latitude of 30°. To provide greater precision, the Level 1B_S0_LoRes product provides the EASE grid index as a floating point number.

This element applies exclusively for footprints that are based on radar signals that were transmitted in vertical polarization. Thus, this index applies to all elements in the Sigma0 Group that have the character string “vv” or “hv” affixed to their name.

cylindrical_grid_row_index_v is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Group
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 14616.0

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Units: n/a

4.6.16 cylindrical_grid_column_index_h

The cylindrical Equal Area Scalable Earth (EASE) grid index in the longitudinal direction at the center of the sigma0 footprint. The referenced cylindrical EASE grid has 1 km resolution and employs a reference latitude of 30°. To provide greater precision, the Level 1B_S0_LoRes product provides the EASE grid index as a floating point number.

This element applies exclusively for footprints that are based on radar signals that were transmitted in horizontal polarization. Thus, this index applies to all elements in the Sigma0 Group that have the character string “hh” or “vh” affixed to their name.

cylindrical_grid_column_index_h is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Group
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 34704.0
Units: n/a

4.6.17 cylindrical_grid_column_index_v

The cylindrical Equal Area Scalable Earth (EASE) grid index in the longitudinal direction at the center of the sigma0 footprint. The referenced cylindrical EASE grid has 1 km resolution and employs a reference latitude of 30°. To provide greater precision, the Level 1B_S0_LoRes product provides the EASE grid index as a floating point number.

This element applies exclusively for footprints that are based on radar signals that were transmitted in vertical polarization. Thus, this index applies to all elements in the Sigma0 Group that have the character string “vv” or “hv” affixed to their name.

cylindrical_grid_column_index_v is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Type: Float32
Group: Sigma0 Group
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 34704.0
Units: n/a

4.6.18 declination

The declination of the spacecraft boresight vector at each instance when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system.

declination is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: Float32
Group: Spacecraft Data
Shape: AntennaScan_Array
Valid_min: -90.0
Valid_max: 90.0
Units: degrees

4.6.19 earth_boresight_azimuth

The angle defined by the clockwise rotation from local North of the projection of antenna boresight vector onto the Earth's surface. The vertex of the angle is at the intersection of the antenna boresight vector with the Earth.

earth_boresight_azimuth is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Valid_max: 359.999**Units:** degrees**4.6.20 earth_boresight_incidence_h**

The angle defined by the antenna boresight vector and the mean surface normal vector relative to the Earth ellipsoid at the center of the sigma0 footprint.

This element applies exclusively for footprints that are based on radar signals that were transmitted in horizontal polarization. Thus, this index applies to all elements in the Sigma0 Group that have the character string “hh” or “vh” affixed to their name.

earth_boresight_incidence_h is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0
Valid_max: 90
Units: degrees

4.6.21 earth_boresight_incidence_v

The angle defined by the antenna boresight vector and the mean surface normal vector relative to the Earth ellipsoid at the center of the sigma0 footprint.

This element applies exclusively for footprints that are based on radar signals that were transmitted in vertical polarization. Thus, this index applies to all elements in the Sigma0 Group that have the character string “vv” or “hv” affixed to their name.

earth_boresight_incidence_v is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Shape: AntennaScan_Sigma0_Array
Valid_min: 0
Valid_max: 90
Units: degrees

4.6.22 faraday_rotation_angle

The net rotation of the polarization plane of the transmitted radar signal.

faraday_rotation_angle is a 2-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: -90.0
Valid_max: 90.0
Units: degrees

4.6.23 faraday_rotation_correction_hh

The correction that the L1B_S0_LoRes algorithm applies to the sigma0 that was transmitted and received in the horizontal polarization channel. L-band radar waves are subject to Faraday Rotation as they travel through ionized atmosphere. Factors that impact the intensity of Faraday Rotation include the Total Electron Content (TEC) of the ionosphere, the Earth magnetic field and the impact of solar radiation on the ionosphere.

faraday_rotation_correction_hh is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Valid_max: 10.0**Units:** n/a**4.6.24 faraday_rotation_correction_hv**

The correction that the L1B_S0_LoRes algorithm applies to the sigma0 that was transmitted from the vertical polarization channel and received in the horizontal polarization channel. L-band radar waves are subject to Faraday Rotation as they travel through ionized atmosphere. Factors that impact the intensity of Faraday Rotation include the Total Electron Content (TEC) of the ionosphere, the Earth magnetic field and the impact of solar radiation on the ionosphere.

faraday_rotation_correction_hv is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32**Group:** Sigma0 Data**Shape:** AntennaScan_Sigma0_Array**Valid_min:** 0.0**Valid_max:** 10.0**Units:** n/a**4.6.25 faraday_rotation_correction_vh**

The correction that the L1B_S0_LoRes algorithm applies to the sigma0 that was transmitted from the horizontal polarization channel and received in the vertical polarization channel. L-band radar waves are subject to Faraday Rotation as they travel through ionized atmosphere. Factors that impact the intensity of Faraday Rotation include the Total Electron Content (TEC) of the ionosphere, the Earth magnetic field and the impact of solar radiation on the ionosphere.

faraday_rotation_correction_vh is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32**Group:** Sigma0 Data

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 10.0
Units: n/a

4.6.26 faraday_rotation_correction_vv

The correction that the L1B_S0_LoRes algorithm applies to the sigma0 that was transmitted and received in the vertical polarization channel. L-band radar waves are subject to Faraday Rotation as they travel through ionized atmosphere. Factors that impact the intensity of Faraday Rotation include the Total Electron Content (TEC) of the ionosphere, the Earth magnetic field and the impact of solar radiation on the ionosphere.

faraday_rotation_correction_vv is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 10.0
Units: n/a

4.6.27 footprint_area

The area of the projected 3 dB beam pattern on the Earth's surface for each sigma0. The 3 dB beam pattern is the region in which the detected power differs by less than 3 dB from the peak power for the corresponding sigma0.

footprint_area is a two-dimensional array. The slower moving dimension index represents an antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Valid_min: 0.0
Valid_max: 1.225.0e9
Units: meters**2

4.6.28 gain_correction_factor_hh

Multiplicative factor applied to sigma0s that were transmitted and received in the horizontal polarization channel. The factor is based on long term variations in ambient conditions.

gain_correction_factor_hh is a two-dimensional array. The slower moving dimension index represents an antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 10.0
Units: n/a

4.6.29 gain_correction_factor_hv

Multiplicative factor applied to sigma0s that were transmitted in the vertical polarization channel and received in the horizontal polarization channel. The factor is based on long term variations in ambient conditions.

gain_correction_factor_hv is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 10.0
Units: n/a

4.6.30 **gain_correction_factor_vh**

Multiplicative factor applied to sigma0s that were transmitted in the horizontal polarization channel and received in the vertical polarization channel. The factor is based on long term variations in ambient conditions.

gain_correction_factor_vh is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 10.0
Units: n/a

4.6.31 **gain_correction_factor_vv**

Multiplicative factor applied to sigma0s that were transmitted and received in the vertical polarization channel. The factor is based on long term variations in ambient conditions.

gain_correction_factor_vv is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 10.0
Units: n/a

4.6.32 **kp_hh**

The normalized standard deviation of the sigma0 that was transmitted and received in the horizontal polarization channel.

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

The following equation expresses the means that the SMAP Level 1B_S0_LoRes SPS uses to calculate K_p :

$$K_p = \left(\frac{\text{stdev}(\sigma_0)}{\text{mean}(\sigma_0)} \right)$$

where $\text{stdev}(\sigma_0)$ represents the the standard deviation of σ_0 .

kp_hh is a two-dimensional array. The slower moving dimension index represents an antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0
Valid_max: 1
Units: n/a

4.6.33 kp_hv

The normalized standard deviation of the sigma0 that was transmitted from the vertical polarization channel and received in the horizontal polarization channel.

The following equation expresses the means that the SMAP Level 1B_S0_LoRes SPS uses to calculate K_p :

$$K_p = \left(\frac{\text{stdev}(\sigma_0)}{\text{mean}(\sigma_0)} \right)$$

where $\text{stdev}(\sigma_0)$ represents the the standard deviation of σ_0 .

kp_hv is a two-dimensional array. The slower moving dimension index represents an antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0
Valid_max: 1
Units: n/a

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

4.6.34 kp_vh

The normalized standard deviation of the sigma0 that was transmitted from the horizontal polarization channel and received in the vertical polarization channel.

The following equation expresses the means that the SMAP Level 1B_S0_LoRes SPS uses to calculate Kp:

$$K_p = \left(\frac{\text{stdev}(\sigma_0)}{\text{mean}(\sigma_0)} \right)$$

where $\text{stdev}(\sigma_0)$ represents the the standard deviation of σ_0 .

kp_vh is a two-dimensional array. The slower moving dimension index represents an antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0
Valid_max: 1
Units: n/a

4.6.35 kp_vv

The normalized standard deviation of the sigma0 that was transmitted and received in the vertical polarization channel.

The following equation expresses the means that the SMAP Level 1B_S0_LoRes SPS uses to calculate Kp:

$$K_p = \left(\frac{\text{stdev}(\sigma_0)}{\text{mean}(\sigma_0)} \right)$$

where $\text{stdev}(\sigma_0)$ represents the the standard deviation of σ_0 .

kp_vv is a two-dimensional array. The slower moving dimension index represents an antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Valid_max: 1**Units:** n/a

4.6.36 pitch

The angular rotation of the instrument fixed frame about the Y axis of the SRF after a 180 degree roll is performed. The Y axis of the SRF is normal to the spacecraft orbital plane. *Pitch* values are interpolated to each instant when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system.

pitch is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: Float32**Group:** Spacecraft Data**Shape:** AntennaScan_Array**Valid_min:** -3.0**Valid_max:** 3.0**Units:** degrees

4.6.37 polar_grid_row_index_h

The polar Equal Area Scalable Earth (EASE) grid index in the latitudinal direction at the center of the sigma0 cell. The referenced polar EASE grid employs a Lambert equal area projection with 1 km resolution. The L1B_S0_LoRes product contains two polar grids to represent global data. Cells with center points in the Northern Hemisphere appear on a grid centered about the North pole. Cells with center points in the Southern Hemisphere appear on a grid centered about the South pole. To provide greater precision, the Level 1B_S0_LoRes product provides the EASE grid index as a floating point number.

This element applies exclusively for footprints that are based on radar signals that were transmitted in horizontal polarization. Thus, this index applies to all elements in the Sigma0 Group that have the character string “hh” or “vh” affixed to their name.

polar_grid_row_index_h is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Type: Float32
Group: Sigma0 Group
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 18000.0
Units: n/a

4.6.38 polar_grid_row_index_v

The polar Equal Area Scalable Earth (EASE) grid index in the latitudinal direction at the center of the sigma0 cell. The referenced polar EASE grid employs a Lambert equal area projection with 1 km resolution. The L1B_S0_LoRes product contains two polar grids to represent global data. Cells with center points in the Northern Hemisphere appear on a grid centered about the North pole. Cells with center points in the Southern Hemisphere appear on a grid centered about the South pole. To provide greater precision, the Level 1B_S0_LoRes product provides the EASE grid index as a floating point number.

This element applies exclusively for footprints that are based on radar signals that were transmitted in vertical polarization. Thus, this index applies to all elements in the Sigma0 Group that have the character string “vv” or “hv” affixed to their name.

polar_grid_row_index_v is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Group
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 18000.0
Units: n/a

4.6.39 polar_grid_column_index_h

The polar Equal Area Scalable Earth (EASE) grid index in the longitudinal direction at the center of the sigma0 footprint. The referenced polar EASE grid

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

employs a Lambert equal area projection with 1 km resolution. The L1B_S0_LoRes product contains two polar grids to represent global data. Cells with center points in the Northern Hemisphere appear on a grid centered about the North pole. Cells with center points in the Southern Hemisphere appear on a grid centered about the South pole. To provide greater precision, the Level 1B_S0_LoRes product provides the EASE grid index as a floating point number.

This element applies exclusively for footprints that are based on radar signals that were transmitted in horizontal polarization. Thus, this index applies to all elements in the Sigma0 Group that have the character string “hh” or “vh” affixed to their name.

polar_grid_column_index_h is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type:	Float32
Group:	Sigma0 Group
Shape:	AntennaScan_Sigma0_Array
Valid_min:	0.0
Valid_max:	18000.0
Units:	n/a

4.6.40 polar_grid_column_index_v

The polar Equal Area Scalable Earth (EASE) grid index in the longitudinal direction at the center of the sigma0 footprint. The referenced polar EASE grid employs a Lambert equal area projection with 1 km resolution. The L1B_S0_LoRes product contains two polar grids to represent global data. Cells with center points in the Northern Hemisphere appear on a grid centered about the North pole. Cells with center points in the Southern Hemisphere appear on a grid centered about the South pole. To provide greater precision, the Level 1B_S0_LoRes product provides the EASE grid index as a floating point number.

This element applies exclusively for footprints that are based on radar signals that were transmitted in vertical polarization. Thus, this index applies to all elements in the Sigma0 Group that have the character string “vv” or “hv” affixed to their name.

polar_grid_column_index_v is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Type: Float32
Group: Sigma0 Group
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 18000.0
Units: n/a

4.6.41 polarization_rotation_angle

The angle of rotation of the orientation of polarization of the radar signal.

polarization_rotation_angle is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Group
Shape: AntennaScan_Sigma0_Array
Valid_min: -90.0
Valid_max: 90
Units: degrees

4.6.42 right_ascension

Right ascension of the spacecraft boresight vector at each instant when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system.

right_ascension is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: Float32
Group: Spacecraft Data
Shape: AntennaScan_Array
Valid_min: 0.0
Valid_max: 359.999
Units: degrees

4.6.43 roll

The angular rotation of the instrument fixed frame about the X axis of the SRF after a 180 degree roll is performed. The X axis of the SRF approximates the direction of spacecraft motion. *Roll* values are interpolated to each instant when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system.

roll is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: Float32
Group: Spacecraft Data
Shape: AntennaScan_Array
Valid_min: -3.0
Valid_max: 3.0
Units: degrees

4.6.44 sc_alongtrack_velocity

The instantaneous velocity of the SMAP spacecraft that is tangent to the spacecraft path within the orbital plane interpolated to each instant when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system.

sc_alongtrack_velocity is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: Float32
Group: Spacecraft Data
Shape: AntennaScan_Array
Valid_min: -8000.0
Valid_max: 8000.0
Units: meters/second

4.6.45 **sc_geodetic_alt_ellipsoid**

The geodetic altitude of the spacecraft above the Earth's reference ellipsoid interpolated to each instant when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system.

sc_geodetic_alt_ellipsoid is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: Float32
Group: Spacecraft Data
Shape: AntennaScan_Array
Valid_min: 650000.0
Valid_max: 750000.0
Units: meters

4.6.46 **sc_nadir_angle**

The angle defined by the spacecraft geodetic nadir vector and the Z-axis of the spacecraft coordinate system. Each measure in this array is interpolated to an instant when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system.

sc_nadir_angle is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: Float32
Group: Spacecraft Data
Shape: AntennaScan_Array
Valid_min: 0.0
Valid_max: 180.0
Units: degrees

4.6.47 **sc_nadir_lat**

The geodetic latitude of the spacecraft's ground track position interpolated to each instant when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system.

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

sc_nadir_lat is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: Float32
Group: Spacecraft Data
Shape: AntennaScan_Array
Valid_min: -90.0
Valid_max: 90.0
Units: degrees

4.6.48 *sc_nadir_lon*

The longitude of the spacecraft's ground track position interpolated to each instant when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system.

sc_nadir_lon is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: Float32
Group: Spacecraft Data
Shape: AntennaScan_Array
Valid_min: -180.0
Valid_max: 179.999
Units: degrees

4.6.49 *sc_radial_velocity*

The velocity of the SMAP spacecraft in the direction of the vector that runs from the instantaneous spacecraft position to the center of the Earth interpolated to each instant when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system.

sc_radial_velocity is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: Float32
Group: Spacecraft Data
Shape: AntennaScan_Array

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Valid_min: -8000.0
Valid_max: 8000.0
Units: meters/second

4.6.50 selected_frequency

The mid-point frequency of the noise-only channel of the radar instrument when the specified corresponding data were acquired.

selected_frequency is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 1218.75
Valid_max: 1296.25
Units: MHz

4.6.51 sigma0_hh

The representative value of the normalized radar cross section measure that was transmitted and received in the horizontal polarization channel.

sigma0_hh is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: -0.01
Valid_max: 10.0
Units: n/a

4.6.52 **sigma0_hh_noise**

The representative value of the normalized radar cross section measure that was transmitted and received in the horizontal polarization channel before the L1B_S0_LoRes algorithm applies noise subtraction.

sigma0_hh_noise is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: -0.01
Valid_max: 10.0
Units: n/a

4.6.53 **sigma0_hh_wind_model**

The co-polar horizontal polarization normalized radar cross section that was calculated using a model based on sea surface winds. Valid values of the *sigma0_hh_wind_model* are limited to locations over the ocean.

sigma0_hh_wind_model lists a null value for all radar footprints over land.

sigma0_hh_wind_model is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: -0.01
Valid_max: 10.0
Units: n/a

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

4.6.54 sigma0_hv

The representative value of the normalized radar cross section measure that was transmitted from the vertical polarization channel and received in the horizontal polarization channel.

sigma0_hv is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: -0.01
Valid_max: 10.0
Units: n/a

4.6.55 sigma0_hv_noise

The representative value of the normalized radar cross section measure that was transmitted from the vertical polarization channel and received in the horizontal polarization channel before the L1B_S0_LoRes algorithm applies noise subtraction.

sigma0_hv_noise is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: -0.01
Valid_max: 10.0
Units: n/a

4.6.56 **sigma0_hv_wind_model**

The normalized radar cross section calculated using a model based on sea surface winds. *sigma0_hv_wind_model* represents cross polarized data transmitted in vertical polarization and received in horizontal polarization. Valid values of the *sigma0_hv_wind_model* are limited to locations over the ocean. *sigma0_hv_wind_model* lists a null value for all radar footprints over land.

sigma0_hv_wind_model is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: -0.01
Valid_max: 10.0
Units: n/a

4.6.57 **sigma0_mode_flag**

Bit flags that indicate operational conditions for each sigma0 measurement in the half orbit swath. Table 14 specifies the meaning of individual bits in the *sigma0_mode_flag*:

Table 14: The *sigma0_mode_flag*

Bits	Value	Interpretation
0		Receive Only Mode
	0	Radar is operating in transmit-receive mode.
	1	Radar is operating in receive only mode.
1		Null Value
	0	At least one channel contains data for this pixel.
	1	No data are available for this pixel.

Bits	Value	Interpretation
2-15		Undefined

sigma0_mode_flag is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Uint16
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Units: n/a

4.6.58 sigma0_qual_flag_hh

Bit flags that indicate the character and quality of the normalized radar cross section measurements that were transmitted and received in the horizontal polarization channel. Table 15 indicates the value of individual bits in the *sigma_qual_flag_hh*:

Table 15: The sigma0_qual_flag_hh

Bits	Value	Interpretation
0		Horizontally polarized quality flag
	0	Horizontally polarized σ_0 has acceptable quality.
	1	Use of the horizontally polarized σ_0 is not recommended.
1		Horizontally polarized range flag
	0	Horizontally polarized σ_0 falls within expected range.
	1	Horizontally polarized σ_0 is outside of expected range.
2		Horizontally polarized RFI clean flag
	0	Insignificant levels of RFI detected in the horizontally polarized σ_0 .

Bits	Value	Interpretation
	1	RFI contaminates horizontally polarized σ_0 .
3		Horizontally polarized Faraday Rotation flag
	0	Faraday rotation correction was applied.
	1	Faraday rotation correction was not applied.
4		Horizontally polarized Kp flag
	0	Kp for horizontally polarized σ_0 is acceptably low.
	1	Kp for horizontally polarized σ_0 is unacceptably high.
5		Horizontal polarization null value
	0	The corresponding horizontal polarization σ_0 contains a calculated value.
	1	The corresponding horizontal polarization σ_0 element is null.
6		Nadir pointing angle
	0	Spacecraft nadir angle is nominal
	1	Spacecraft nadir angle is off nominal
7-15		Spare

sigma0_qual_flag_hh is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Uint16
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Units: n/a

4.6.59 sigma0_qual_flag_hv

Bit flags that indicate the character and quality of normalized radar cross section measurements that were transmitted from the vertical polarization channel and received in the horizontal polarization channel. Table 16 indicates the value of individual bits in the *sigma_qual_flag_hv*:

Table 16: The *sigma0_qual_flag_hv*

Bits	Value	Interpretation
0		HV cross polarized quality flag
	0	HV cross polarized σ_0 has acceptable quality.
	1	Use of the HV cross polarized σ_0 is not recommended.
1		HV cross polarized range flag
	0	HV cross polarized σ_0 falls within expected range.
	1	HV cross polarized σ_0 is outside of expected range.
2		HV cross polarized RFI clean flag
	0	Insignificant levels of RFI detected in the HV cross polarized σ_0 .
	1	RFI contaminates HV cross polarized σ_0 .
3		HV cross polarized Faraday Rotation flag
	0	Faraday rotation correction was applied.
	1	Faraday rotation correction was not applied.
4		HV cross polarized Kp flag
	0	Kp for HV cross polarized σ_0 is acceptably low.
	1	Kp for HV cross polarized σ_0 is unacceptably high.
5		HV cross polarization null value

Bits	Value	Interpretation
	0	The corresponding HV cross polarized σ_0 contains a calculated value.
	1	The corresponding HV cross polarized σ_0 element is null.
6		Nadir pointing angle
	0	Spacecraft nadir angle is nominal
	1	Spacecraft nadir angle is off nominal
7-15		Spare

sigma0_qual_flag_hv is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Uint16
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Units: n/a

4.6.60 sigma0_qual_flag_vh

Bit flags that indicate the character and quality of normalized radar cross section measurements that were transmitted from the horizontal polarization channel and received in the vertical polarization channel. Table 17 indicates the value of individual bits in the *sigma_qual_flag_vh*:

Table 17: The sigma0_qual_flag_vh

Bits	Value	Interpretation
0		VH cross polarized quality flag
	0	VH cross polarized σ_0 has acceptable quality.
	1	Use of the VH cross polarized σ_0 is not recommended.
1		VH cross polarized range flag

Bits	Value	Interpretation
	0	VH cross polarized σ_0 falls within expected range.
	1	VH cross polarized σ_0 is outside of expected range.
2		VH cross polarized RFI clean flag
	0	Insignificant levels of RFI detected in the VH cross polarized σ_0 .
	1	RFI contaminates VH cross polarized σ_0 .
3		VH cross polarized Faraday Rotation flag
	0	Faraday rotation correction was applied.
	1	Faraday rotation correction was not applied.
4		VH cross polarized Kp flag
	0	Kp for VH cross polarized σ_0 is acceptably low.
	1	Kp for VH cross polarized σ_0 is unacceptably high.
5		VH cross polarization null value
	0	The corresponding VH cross polarized σ_0 contains a calculated value.
	1	The corresponding VH cross polarized σ_0 element is null.
6		Nadir pointing angle
	0	Spacecraft nadir angle is nominal
	1	Spacecraft nadir angle is off nominal
7-15		Spare

sigma0_qual_flag_vh is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Type: Uint16
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Units: n/a

4.6.61 sigma0_qual_flag_vv

Bit flags that indicate the character and quality of the normalized radar cross section measurements that were transmitted and received in the vertical polarization channel. Table 18 indicates the value of individual bits in the *sigma_qual_flag_vv*:

Table 18: The sigma0_qual_flag_vv

Bits	Value	Interpretation
0		Vertically polarized quality flag
	0	Vertically polarized σ_0 has acceptable quality.
	1	Use of the Vertically polarized σ_0 is not recommended.
1		Vertically polarized range flag
	0	Vertically polarized σ_0 falls within expected range.
	1	Vertically polarized σ_0 is outside of expected range.
2		Vertically polarized RFI clean flag
	0	Insignificant levels of RFI detected in the Vertically polarized σ_0 .
	1	RFI contaminates Vertically polarized σ_0 .
3		Vertically polarized Faraday Rotation flag
	0	Faraday rotation correction was applied.
	1	Faraday rotation correction was not applied.
4		Vertically polarized Kp flag

Bits	Value	Interpretation
	0	Kp for Vertically polarized σ_0 is acceptably low.
	1	Kp for Vertically polarized σ_0 is unacceptably high.
5		Vertical polarization null value
	0	The corresponding vertical polarization σ_0 contains a calculated value.
	1	The corresponding vertical polarization σ_0 element is null.
6		Nadir pointing angle
	0	Spacecraft nadir angle is nominal
	1	Spacecraft nadir angle is off nominal
7-15		Spare

sigma0_qual_flag_vv is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Uint16
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Units: n/a

4.6.62 sigma0_time_seconds

The representative time in seconds when each normalized radar backscatter measure within the antenna scan was recorded. The specified time is equivalent to the begin time of the first of the 48 pulse repetition intervals that comprise each backscatter measure. Time values are counts of International System (SI) seconds based on the J2000 epoch in Ephemeris Time (ET). The J2000 epoch starting point is January 1, 2000 at 12:00 ET, which translates to January 1, 2000 at 11:58:55.816 Universal Coordinated Time (UTC).

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

sigma0_time_seconds is a 2-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float64
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0
Valid_max: 946000000
Units: seconds

4.6.63 *sigma0_time_utc*

The representative Universal Coordinated Time (UTC) for each normalized radar backscatter measure within the antenna scan. The specified time is equivalent to the begin time of the first of the 48 pulse repetition intervals that comprise each backscatter measure. For each antenna scan, the *sigma0_time_utc* records the same sigma0 times as the *sigma0_time_seconds*. The *sigma0_time_utc* appears as an easily interpretable character string.

The format of the *sigma0_time_utc* is YYYY-MM-DDThh:mm:ss.dddZ, where YYYY represents the calendar year, MM represents the month of the year and DD represents the day of the month. The character 'T' demarcates the date from the time. hh represents the hour in twenty-four hour time, mm represents the minutes, ss represents the seconds, and ddd represents thousandths of a second. The character 'Z' designates Greenwich Mean Time. All numerical fields must occupy the allotted space. If any numerical value does not require the allotted space to represent the appropriate number, the field that specifies the number must contain leading zeroes.

sigma0_time_utc is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: FixLenStr
String Length: 24 characters
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Valid_min: '2014-10-31T00:00:00.000Z'**Valid_max:** '2030-12-31T23:59:60.999Z'**Units:** n/a**4.6.64 sigma0_vh**

The representative value of the normalized radar cross section measure that was transmitted from the horizontal polarization channel and received in the vertical polarization channel.

sigma0_vh is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32**Group:** Sigma0 Data**Shape:** AntennaScan_Sigma0_Array**Valid_min:** -0.01**Valid_max:** 10.0**Units:** n/a**4.6.65 sigma0_vh_noise**

The representative value of the normalized radar cross section measure that was transmitted from the horizontal polarization channel and received in the vertical polarization channel before the L1B_S0_LoRes algorithm applies noise subtraction.

sigma0_vh_noise is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32**Group:** Sigma0 Data**Shape:** AntennaScan_Sigma0_Array**Valid_min:** -0.01**Valid_max:** 10.0**Units:** n/a

4.6.66 **sigma0_vh_wind_model**

The normalized radar cross section calculated using a model based on sea surface winds. *sigma0_vh_wind_model* represents cross polarized data transmitted in horizontal polarization and received in vertical polarization. Valid values of the *sigma0_vh_wind_model* are limited to locations over the ocean. *sigma0_vh_wind_model* lists a null value for all radar footprints over land.

sigma0_vh_wind_model is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: -0.01
Valid_max: 10.0
Units: n/a

4.6.67 **sigma0_vv**

The representative value of the normalized radar cross section measure that was transmitted and received in the vertical polarization channel.

sigma0_vv is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: -0.01
Valid_max: 10.0
Units: n/a

4.6.68 **sigma0_vv_noise**

The representative value of the normalized radar cross section measure that was transmitted and received in the vertical polarization channel before the L1B_S0_LoRes algorithm applies noise subtraction.

sigma0_vv_noise is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: -0.01
Valid_max: 10.0
Units: n/a

4.6.69 **sigma0_vv_wind_model**

The co-polar vertical polarization normalized radar cross section that was calculated using a model based on sea surface winds. Valid values of the *sigma0_vv_wind_model* are limited to locations over the ocean.

sigma0_vv_wind_model lists a null value for all radar footprints over land.

sigma0_vv_wind_model is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: -0.01
Valid_max: 10.0
Units: n/a

4.6.70 **sigma0s_per_scan**

The number of valid normalized radar cross section footprints that appear in the L1B_S0_LoRes Product within each antenna scan

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Each low resolution footprint combines data from 48 radar Pulse Repetition Intervals (PRIs). Thus, the expected number of footprints within a scan is equal to the integer quotient of the scan rotation time and the time span of 48 PRIs. Under nominal conditions, *sigma0s_per_scan* should be very nearly equal to the expected number of sigma0s in a scan.

sigma0s_per_scan is a one-dimensional array. Each array index is representative of a specific antenna scan.

Type: Uint16
Group: Spacecraft Data
Shape: AntennaScan_Array
Valid_min: 0
Valid_max: 301
Units: n/a

4.6.71 *sigma0_spatial_resolution*

The representative spatial resolution of the sigma0 footprint. This value is equivalent to the square root of the area of the sigma0 3 dB footprint.

sigma0_spatial_resolution is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 100.0
Valid_max: 35000.0
Units: meters

4.6.72 *significant_wave_height*

The interpolated average height of waves above the sea surface at the center of the corresponding σ_0 . Wave height measurements are based on data provided by the National Centers for Environmental Prediction (NCEP) of the National Oceanographic and Atmospheric Administration (NOAA). SMAP radar data processing employs the *significant_wave_height* over the ocean surface as a

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

means to track long term trends of the radar instrument. These data appear only for sigma0s acquired over the oceans. *significant_wave_height* lists a null value for all radar footprints over land.

significant_wave_height is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 15.0
Units: meters

4.6.73 slant_range

The mean of the sight distance between the instantaneous location of the SMAP antenna and the center of the sigma0 footprint.

slant_range is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 700000.0
Valid_max: 1100000.0
Units: meters

4.6.74 slice_altitude

The representative altitude of the Earth's surface at the center of the sigma0 slice.

slice_altitude is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: -100.0
Valid_max: 9000.0
Units: meters

4.6.75 slice_altitude_std_dev

The standard deviation of the altitude of the Earth's surface at the center of the sigma0 slice.

slice_altitude_std_dev is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving dimension index represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.0
Valid_max: 10000.0
Units: meters

4.6.76 slice_area

The gain weighted effective area of the slice. The portion of the area of the projected 3 dB beam pattern on the Earth's surface covered by each sigma0 slice. Line divisors of the slices run perpendicular to the axis of the sigma0 cell that is collinear with the projection of the boresight vector on the Earth's surface.

slice_area is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving dimension index represents each of

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.0
Valid_max: 1.8e8
Units: meters**2

4.6.77 slice_azimuth_length

The length of the slice in the azimuthal direction. This value is equivalent to the quotient of the *slice_area* and the *slice_earth_incidence_h* or *slice_earth_incidence_v*, depending on the polarization of the transmission channel.

slice_azimuth_length is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 15000.0
Valid_max: 45000.0
Units: meters

4.6.78 slice_cylindrical_grid_column_index_h

The cylindrical Equal Area Scalable Earth (EASE) grid index in the longitudinal direction at the center of the sigma0 slice. Each slice center lies on the axis of the sigma0 cell that is collinear with the projection of the boresight vector on the Earth's surface. The referenced cylindrical EASE grid has 1 km resolution and employs a reference latitude of 30°. To provide greater precision, the Level 1B_S0_LoRes product provides the EASE grid index as a floating point number.

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

This element applies exclusively for footprint slices that are based on radar signals that were transmitted in horizontal polarization. Thus, this index applies to all elements in the Sigma0 Slice Group that have the character string “hh” or “vh” affixed to their name.

slice_cylindrical_grid_column_index_h is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Group
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.0
Valid_max: 34704.0
Units: n/a

4.6.79 slice_cylindrical_grid_column_index_v

The cylindrical Equal Area Scalable Earth (EASE) grid index in the longitudinal direction at the center of the sigma0 slice. Each slice center lies on the axis of the sigma0 cell that is collinear with the projection of the boresight vector on the Earth's surface. The referenced cylindrical EASE grid has 1 km resolution and employs a reference latitude of 30°. To provide greater precision, the Level 1B_S0_LoRes product provides the EASE grid index as a floating point number.

This element applies exclusively for footprint slices that are based on radar signals that were transmitted in vertical polarization. Thus, this index applies to all elements in the Sigma0 Slice Group that have the character string “vv” or “hv” affixed to their name.

slice_cylindrical_grid_column_index_v is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Group
Shape: AntennaScan_Sigma0_Slice_Array

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Valid_min: 0.0
Valid_max: 34704.0
Units: n/a

4.6.80 **slice_cylindrical_grid_row_index_h**

The cylindrical Equal Area Scalable Earth (EASE) grid index in the latitudinal direction at the center the sigma0 slice. Each slice center lies on the axis of the sigma0 cell that is collinear with the projection of the boresight vector on the Earth's surface. The referenced cylindrical EASE grid has 1 km resolution and employs a reference latitude of 30°. To provide greater precision, the Level 1B_S0_LoRes product provides the EASE grid index as a floating point number.

This element applies exclusively for footprint slices that are based on radar signals that were transmitted in horizontal polarization. Thus, this index applies to all elements in the Sigma0 Slice Group that have the character string “hh” or “vh” affixed to their name.

slice_cylindrical_grid_row_index_h is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Group
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.0
Valid_max: 14616.0
Units: n/a

4.6.81 **slice_cylindrical_grid_row_index_v**

The cylindrical Equal Area Scalable Earth (EASE) grid index in the latitudinal direction at the center the sigma0 slice. Each slice center lies on the axis of the sigma0 cell that is collinear with the projection of the boresight vector on the Earth's surface. The referenced cylindrical EASE grid has 1 km resolution and employs a reference latitude of 30°. To provide greater precision, the Level 1B_S0_LoRes product provides the EASE grid index as a floating point number.

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

This element applies exclusively for footprint slices that are based on radar signals that were transmitted in vertical polarization. Thus, this index applies to all elements in the Sigma0 Slice Group that have the character string “vv” or “hv” affixed to their name.

slice_cylindrical_grid_row_index_v is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Group
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.0
Valid_max: 14616.0
Units: n/a

4.6.82 slice_earth_incidence_h

The angle defined by the antenna boresight vector and the mean surface normal vector relative to the Earth ellipsoid at the center of the slice.

This element applies exclusively for footprint slices that are based on radar signals that were transmitted in horizontal polarization. Thus, this index applies to all elements in the Sigma0 Slice Group that have the character string “hh” or “vh” affixed to their name.

slice_earth_incidence is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0
Valid_max: 90
Units: degrees

4.6.83 slice_earth_incidence_v

The angle defined by the antenna boresight vector and the mean surface normal vector relative to the Earth ellipsoid at the center of the slice.

This element applies exclusively for footprint slices that are based on radar signals that were transmitted in vertical polarization. Thus, this index applies to all elements in the Sigma0 Slice Group that have the character string “vv” or “hv” affixed to their name.

slice_earth_incidence is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0
Valid_max: 90
Units: degrees

4.6.84 slice_elevation_length

The length of the range bin projected from the slice_earth_incidence angle onto the Earth’s surface.

slice_elevation_length is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Valid_min: 2000.0
Valid_max: 10000.0
Units: meters

4.6.85 **slice_faraday_rotation_angle**

The net rotation of the polarization plane of the transmitted radar signal for each slice sigma0.

slice_faraday_rotation_angle is a 3-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: -90.0
Valid_max: 90.0
Units: degrees

4.6.86 **slice_gain_correction_factor_hh**

Multiplicative factor applied to slice sigma0s that were transmitted and received in the horizontal polarization channel. The factor is based on long term variations in ambient conditions.

gain_correction_factor_hh is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Valid_min: 0.0
Valid_max: 10.0
Units: n/a

4.6.87 slice_gain_correction_factor_hv

Multiplicative factor applied to slice sigma0s that were transmitted from the vertical polarization channel and received in the horizontal polarization channel. The factor is based on long term variations in ambient conditions.

gain_correction_factor_hv is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.0
Valid_max: 10.0
Units: n/a

4.6.88 slice_gain_correction_factor_vh

Multiplicative factor applied to slice sigma0s that were transmitted from the horizontal polarization channel and received in the vertical polarization channel. The factor is based on long term variations in ambient conditions.

gain_correction_factor_vh is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.0

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Valid_max: 10.0**Units:** n/a**4.6.89 slice_gain_correction_factor_vv**

Multiplicative factor applied to slice sigma0s that were transmitted and received in the vertical polarization channel. The factor is based on long term variations in ambient conditions.

gain_correction_factor_vv is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32**Group:** Sigma0 Slice Data**Shape:** AntennaScan_Sigma0_Slice_Array**Valid_min:** 0.0**Valid_max:** 10.0**Units:** n/a**4.6.90 slice_gradient**

The acute angle between the zenith vector and representative normal to the Earth's surface at the center of the sigma0 slice.

slice_gradient is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32**Group:** Sigma0 Slice Group**Shape:** AntennaScan_Sigma0_Slice_Array**Valid_min:** 0.0

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Valid_max: 90.0**Units:** degrees

4.6.91 slice_kp_hh

The normalized standard deviation of the normalized radar cross section that was transmitted and received in the horizontal polarization channel for the corresponding slice.

slice_kp_hh is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32**Group:** Sigma0 Slice Data**Shape:** AntennaScan_Sigma0_Slice_Array**Valid_min:** 0**Valid_max:** 1**Units:** n/a

4.6.92 slice_kp_hv

The normalized standard deviation of the normalized radar cross section that was transmitted from the vertical polarization channel and received in the horizontal polarization channel for the corresponding slice.

slice_kp_hv is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32**Group:** Sigma0 Slice Data**Shape:** AntennaScan_Sigma0_Slice_Array**Valid_min:** 0**Valid_max:** 1

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Units: n/a**4.6.93 slice_kp_vh**

The normalized standard deviation of the normalized radar cross section that was transmitted from the horizontal polarization channel and received in the vertical polarization channel for the corresponding slice.

slice_kp_vh is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0
Valid_max: 1
Units: n/a

4.6.94 slice_kp_vv

The normalized standard deviation of the normalized radar cross section that was transmitted and received in the vertical polarization channel for the corresponding slice.

slice_kp_vv is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0
Valid_max: 1
Units: n/a

4.6.95 slice_lat_h

The geodetic latitude of the center of the sigma0 slice. Each slice center lies on the axis of the sigma0 cell that is collinear with the projection of the boresight vector on the Earth's surface.

This element applies exclusively for footprint slices that are based on radar signals that were transmitted in horizontal polarization. Thus, this index applies to all elements in the Sigma0 Slice Group that have the character string "hh" or "vh" affixed to their name.

slice_lat_h is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type:	Float32
Group:	Sigma0 Slice Data
Shape:	AntennaScan_Sigma0_Slice_Array
Valid_min:	-90
Valid_max:	90
Units:	degrees

4.6.96 slice_lat_v

The geodetic latitude of the center of the sigma0 slice. Each slice center lies on the axis of the sigma0 cell that is collinear with the projection of the boresight vector on the Earth's surface.

This element applies exclusively for footprint slices that are based on radar signals that were transmitted in vertical polarization. Thus, this index applies to all elements in the Sigma0 Slice Group that have the character string "vv" or "hv" affixed to their name.

slice_lat_v is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type:	Float32
--------------	---------

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: -90
Valid_max: 90
Units: degrees

4.6.97 slice_lon_h

The longitude of the center of the sigma0 slice. Each slice center lies on the axis of the sigma0 cell that is collinear with the projection of the boresight vector on the Earth's surface.

This element applies exclusively for footprint slices that are based on radar signals that were transmitted in horizontal polarization. Thus, this index applies to all elements in the Sigma0 Slice Group that have the character string "hh" or "vh" affixed to their name.

slice_lon_h is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: -180
Valid_max: 179.999
Units: degrees

4.6.98 slice_lon_v

The longitude of the center of the sigma0 slice. Each slice center lies on the axis of the sigma0 cell that is collinear with the projection of the boresight vector on the Earth's surface.

This element applies exclusively for footprint slices that are based on radar signals that were transmitted in vertical polarization. Thus, this index applies to

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

all elements in the Sigma0 Slice Group that have the character string “vv” or “hv” affixed to their name.

slice_lon_v is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type:	Float32
Group:	Sigma0 Slice Data
Shape:	AntennaScan_Sigma0_Slice_Array
Valid_min:	-180
Valid_max:	179.999
Units:	degrees

4.6.99 slice_polar_grid_column_index_h

The polar Equal Area Scalable Earth (EASE) grid index in the longitudinal direction at the center of the sigma0 slice. Each slice center lies on the axis of the sigma0 cell that is collinear with the projection of the boresight vector on the Earth's surface. The referenced polar EASE grid employs a Lambert equal area projection with 1 km resolution. The L1B_S0_LoRes product contains two polar grids to represent global data. Cells with center points in the Northern Hemisphere appear on a grid centered about the North pole. Cells with center points in the Southern Hemisphere appear on a grid centered about the South pole. To provide greater precision, the Level 1B_S0_LoRes product provides the EASE grid index as a floating point number.

This element applies exclusively for footprint slices that are based on radar signals that were transmitted in horizontal polarization. Thus, this index applies to all elements in the Sigma0 Slice Group that have the character string “hh” or “vh” affixed to their name.

slice_polar_grid_column_index_h is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type:	Float32
--------------	---------

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Group: Sigma0 Slice Group
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.0
Valid_max: 18000.0
Units: n/a

4.6.100 slice_polar_grid_column_index_v

The polar Equal Area Scalable Earth (EASE) grid index in the longitudinal direction at the center of the sigma0 slice. Each slice center lies on the axis of the sigma0 cell that is collinear with the projection of the boresight vector on the Earth's surface. The referenced polar EASE grid employs a Lambert equal area projection with 1 km resolution. The L1B_S0_LoRes product contains two polar grids to represent global data. Cells with center points in the Northern Hemisphere appear on a grid centered about the North pole. Cells with center points in the Southern Hemisphere appear on a grid centered about the South pole. To provide greater precision, the Level 1B_S0_LoRes product provides the EASE grid index as a floating point number.

This element applies exclusively for footprint slices that are based on radar signals that were transmitted in vertical polarization. Thus, this index applies to all elements in the Sigma0 Slice Group that have the character string "vv" or "hv" affixed to their name.

slice_polar_grid_column_index_v is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Group
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.0
Valid_max: 18000.0
Units: n/a

4.6.101 slice_polar_grid_row_index_h

The polar Equal Area Scalable Earth (EASE) grid index in the latitudinal direction at the center of the sigma0 slice. Each slice center lies on the axis of the sigma0 cell that is collinear with the projection of the boresight vector on the Earth's surface. The referenced polar EASE grid employs a Lambert equal area projection with 1 km resolution. The L1B_S0_LoRes product contains two polar grids to represent global data. Cells with center points in the Northern Hemisphere appear on a grid centered about the North pole. Cells with center points in the Southern Hemisphere appear on a grid centered about the South pole. To provide greater precision, the Level 1B_S0_LoRes product provides the EASE grid index as a floating point number.

This element applies exclusively for footprint slices that are based on radar signals that were transmitted in horizontal polarization. Thus, this index applies to all elements in the Sigma0 Slice Group that have the character string "hh" or "vh" affixed to their name.

slice_polar_grid_row_index_h is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type:	Float32
Group:	Sigma0 Slice Group
Shape:	AntennaScan_Sigma0_Slice_Array
Valid_min:	0.0
Valid_max:	18000.0
Units:	n/a

4.6.102 slice_polar_grid_row_index_v

The polar Equal Area Scalable Earth (EASE) grid index in the latitudinal direction at the center of the sigma0 slice. Each slice center lies on the axis of the sigma0 cell that is collinear with the projection of the boresight vector on the Earth's surface. The referenced polar EASE grid employs a Lambert equal area projection with 1 km resolution. The L1B_S0_LoRes product contains two polar grids to represent global data. Cells with center points in the Northern Hemisphere appear on a grid centered about the North pole. Cells with center

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

points in the Southern Hemisphere appear on a grid centered about the South pole. To provide greater precision, the Level 1B_S0_LoRes product provides the EASE grid index as a floating point number.

This element applies exclusively for footprint slices that are based on radar signals that were transmitted in vertical polarization. Thus, this index applies to all elements in the Sigma0 Slice Group that have the character string “vv” or “hv” affixed to their name.

slice_polar_grid_row_index_v is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Group
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.0
Valid_max: 18000.0
Units: n/a

4.6.103 slice_polarization_rotation_angle

The angle of rotation of the orientation of polarization of the radar signal for the corresponding sigma0 slice.

slice_polarization_rotation_angle is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Group
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: -90.0
Valid_max: 90
Units: degrees

4.6.104 slice_sigma0_hh

The representative value of the normalized radar cross section measure for the corresponding slice that was transmitted and received in the horizontal polarization channel.

slice_sigma0_hh is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type:	Float32
Group:	Sigma0 Data
Shape:	AntennaScan_Sigma0_Slice_Array
Valid_min:	-0.01
Valid_max:	10.0
Units:	n/a

4.6.105 slice_sigma0_hh_noise

The representative value of the normalized radar cross section measure for the corresponding slice that was transmitted and received in the horizontal polarization channel before the L1B_S0_LoRes algorithm applies noise subtraction.

slice_sigma0_hh_noise is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type:	Float32
Group:	Sigma0 Data
Shape:	AntennaScan_Sigma0_Slice_Array
Valid_min:	-0.01
Valid_max:	10.0

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Units: n/a**4.6.106 slice_sigma0_hh_wind_model**

The co-polar horizontal polarization normalized radar cross section for the corresponding slice sigma0 calculated using a model based on sea surface winds. Valid values of the *slice_sigma0_hh_wind_model* are limited to locations over the ocean. *slice_sigma0_hh_wind_model* lists a null value for all radar footprints over land.

slice_sigma0_hh_wind_model is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: -0.01
Valid_max: 10.0
Units: n/a

4.6.107 slice_sigma0_hv

The representative value of the normalized radar cross section measure for the corresponding slice that was transmitted from the vertical polarization channel and received in the horizontal polarization channel.

slice_sigma0_hv is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Valid_min: -0.01**Valid_max:** 10.0**Units:** n/a**4.6.108 slice_sigma0_hv_noise**

The representative value of the normalized radar cross section measure for the corresponding slice that was transmitted from the vertical polarization channel and received in the horizontal polarization channel before the L1B_S0_LoRes algorithm applies noise subtraction.

slice_sigma0_hv_noise is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32**Group:** Sigma0 Slice Data**Shape:** AntennaScan_Sigma0_Slice_Array**Valid_min:** -0.01**Valid_max:** 10.0**Units:** n/a**4.6.109 slice_sigma0_hv_wind_model**

The normalized radar cross section calculated for the corresponding slice sigma0 using a model based on sea surface winds. *slice_sigma0_hv_wind_model* represents cross polarized data transmitted in vertical polarization and received in horizontal polarization. Valid values of the *slice_sigma0_hv_wind_model* are limited to locations over the ocean. *slice_sigma0_hv_wind_model* lists a null value for all radar footprints over land.

slice_sigma0_hv_wind_model is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: -0.01
Valid_max: 10.0
Units: n/a

4.6.110 slice_sigma0_qual_flag_hh

Bit flags that indicate the character and quality of the each of the slices of the normalized radar cross section measurements that were transmitted and received in the horizontal polarization channel. Table 19 indicates the value of individual bits in the slice_sigma0_qual_flag_hh:

Table 19: The slice_sigma0_qual_flag_hh

Bits	Value	Interpretation
0		Horizontally polarized slice quality flag
	0	Horizontally polarized σ_0 slice has acceptable quality.
	1	Use of the horizontally polarized σ_0 slice is not recommended.
1		Horizontally polarized slice range flag
	0	Horizontally polarized σ_0 slice falls within expected range.
	1	Horizontally polarized σ_0 slice is outside of expected range.
2		Horizontally polarized RFI clean flag
	0	Insignificant levels of RFI detected in the horizontally polarized σ_0 slice.
	1	RFI contaminates horizontally polarized σ_0 slice.

Bits	Value	Interpretation
3		Horizontally polarized slice Faraday Rotation flag
	0	Faraday rotation correction was applied.
	1	Faraday rotation correction was not applied.
4		Horizontally polarized slice Kp flag
	0	Kp for horizontally polarized σ_0 slice is acceptably low.
	1	Kp for horizontally polarized σ_0 slice is unacceptably high.
5		Horizontal polarization slice null value
	0	The corresponding horizontal polarization σ_0 slice contains a calculated value.
	1	The corresponding horizontal polarization σ_0 slice element is null.
6-15		Spare

slice_sigma0_qual_flag_hh is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Uint16
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Units: n/a

4.6.111 slice_sigma0_qual_flag_hv

Bit flags that indicate the character and quality of the each of the slices of the normalized radar cross section measurements that were transmitted from the vertical polarization channel and received in the horizontal polarization channel. Table 20 indicates the value of individual bits in the *slice_sigma_qual_flag_hv*:

Table 20: The slice_sigma0_qual_flag_hv

Bits	Value	Interpretation
0		HV cross polarized slice quality flag
	0	HV cross polarized σ_0 slice has acceptable quality.
	1	Use of the HV cross polarized σ_0 slice is not recommended.
1		HV cross polarized slice range flag
	0	HV cross polarized σ_0 slice falls within expected range.
	1	HV cross polarized σ_0 slice is outside of expected range.
2		HV cross polarized RFI clean flag
	0	Insignificant levels of RFI detected in the HV cross polarized σ_0 slice.
	1	RFI contaminates HV cross polarized σ_0 slice.
3		HV cross polarized slice Faraday Rotation flag
	0	Faraday rotation correction was applied.
	1	Faraday rotation correction was not applied.
4		HV cross polarized slice Kp flag
	0	Kp for HV cross polarized σ_0 slice is acceptably low.
	1	Kp for HV cross polarized σ_0 slice is unacceptably high.
5		HV cross polarization slice null value
	0	The corresponding HV cross polarized σ_0 slice contains a calculated value.
	1	The corresponding HV cross polarized σ_0 slice element is null.

Bits	Value	Interpretation
6-15		Spare

slice_sigma0_qual_flag_hv is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Uint16

Group: Sigma0 Slice Data

Shape: AntennaScan_Sigma0_Slice_Array

Units: n/a

4.6.112 slice_sigma0_qual_flag_vh

Bit flags that indicate the character and quality of the each of the slices of the normalized radar cross section measurements that were transmitted from the horizontal polarization channel and received in the vertical polarization channel. Table 21 indicates the value of individual bits in the *slice_sigma0_qual_flag_vh*:

Table 21: The *slice_sigma0_qual_flag_vh*

Bits	Value	Interpretation
0		VH cross polarized slice quality flag
	0	VH cross polarized σ_0 slice has acceptable quality.
	1	Use of the VH cross polarized σ_0 slice is not recommended.
1		VH cross polarized slice range flag
	0	VH cross polarized σ_0 slice falls within expected range.
	1	VH cross polarized σ_0 slice is outside of expected range.
2		VH cross polarized RFI clean flag
	0	Insignificant levels of RFI detected in the VH cross

Bits	Value	Interpretation
		polarized σ_0 slice.
	1	RFI contaminates VH cross polarized σ_0 slice.
3		VH cross polarized slice Faraday Rotation flag
	0	Faraday rotation correction was applied.
	1	Faraday rotation correction was not applied.
4		VH cross polarized slice Kp flag
	0	Kp for VH cross polarized σ_0 slice is acceptably low.
	1	Kp for VH cross polarized σ_0 slice is unacceptably high.
5		VH cross polarization slice null value
	0	The corresponding VH cross polarized σ_0 slice contains a calculated value.
	1	The corresponding VH cross polarized σ_0 slice element is null.
6-15		Spare

slice_sigma0_qual_flag_vh is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Uint16

Group: Sigma0 Slice Data

Shape: AntennaScan_Sigma0_Slice_Array

Units: n/a

4.6.113 slice_sigma0_qual_flag_vv

Bit flags that indicate the character and quality of the each of the slices of the normalized radar cross section measurements that were transmitted and received in the vertical polarization channel. Table 22 indicates the value of individual bits in the *slice_sigma0_qual_flag_vv*.

Table 22: The *slice_sigma0_qual_flag_vv*

Bits	Value	Interpretation
0		Vertically polarized slice quality flag
	0	Vertically polarized σ_0 slice has acceptable quality.
	1	Use of the vertically polarized σ_0 slice is not recommended.
1		Vertically polarized slice range flag
	0	Vertically polarized σ_0 slice falls within expected range.
	1	Vertically polarized σ_0 slice is outside of expected range.
2		Vertically polarized RFI clean flag
	0	Insignificant levels of RFI detected in the vertically polarized σ_0 slice.
	1	RFI contaminates vertically polarized σ_0 slice.
3		Vertically polarized slice Faraday Rotation flag
	0	Faraday rotation correction was applied.
	1	Faraday rotation correction was not applied.
4		Vertically polarized slice Kp flag
	0	Kp for vertically polarized σ_0 slice is acceptably low.
	1	Kp for vertically polarized σ_0 slice is unacceptably high.
5		Vertical polarization slice null value

Bits	Value	Interpretation
	0	The corresponding vertical polarization σ_0 slice contains a calculated value.
	1	The corresponding vertical polarization σ_0 slice element is null.
6-15		Spare

slice_sigma0_qual_flag_vv is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Uint16
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Units: n/a

4.6.114 slice_sigma0_vh

The representative value of the normalized radar cross section measure for the corresponding slice that was transmitted from the horizontal polarization channel and received in the vertical polarization channel.

slice_sigma0_vh is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: -0.01
Valid_max: 10.0
Units: n/a

4.6.115 slice_sigma0_vh_noise

The representative value of the normalized radar cross section measure for the corresponding slice that was transmitted from the horizontal polarization channel and received in the vertical polarization channel before the L1B_S0_LoRes algorithm applies noise subtraction.

slice_sigma0_vh_noise is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: -0.01
Valid_max: 10.0
Units: n/a

4.6.116 slice_sigma0_vh_wind_model

The normalized radar cross section for the corresponding slice sigma0 calculated using a model based on sea surface winds. *slice_sigma0_vh_wind_model* represents cross polarized data transmitted in horizontal polarization and received in vertical polarization. Valid values of the *slice_sigma0_vh_wind_model* are limited to locations over the ocean. *slice_sigma0_vh_wind_model* lists a null value for all radar footprints over land.

slice_sigma0_vh_wind_model is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Valid_min: -0.01**Valid_max:** 10.0**Units:** n/a**4.6.117 slice_sigma0_vv**

The representative value of the normalized radar cross section measure for the corresponding slice that was transmitted and received in the vertical polarization channel.

slice_sigma0_vv is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32**Group:** Sigma0 Slice Data**Shape:** AntennaScan_Sigma0_Slice_Array**Valid_min:** -0.01**Valid_max:** 10.0**Units:** n/a**4.6.118 slice_sigma0_vv_noise**

The representative value of the normalized radar cross section measure for the corresponding slice that was transmitted and received in the vertical polarization channel before the L1B_S0_LoRes algorithm applies noise subtraction.

slice_sigma0_vv_noise is a three-dimensional array. The slowest moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32**Group:** Sigma0 Slice Data**Shape:** AntennaScan_Sigma0_Slice_Array**Valid_min:** -0.01

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Valid_max: 10.0**Units:** n/a**4.6.119 slice_sigma0_vv_wind_model**

The co-polar vertical polarization normalized radar cross section for the corresponding slice sigma0 calculated using a model based on sea surface winds. Valid values of the *slice_sigma0_vv_wind_model* are limited to locations over the ocean. *slice_sigma0_vv_wind_model* lists a null value for all radar footprints over land.

slice_sigma0_vv_wind_model is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32**Group:** Sigma0 Slice Data**Shape:** AntennaScan_Sigma0_Slice_Array**Valid_min:** -0.01**Valid_max:** 10.0**Units:** n/a**4.6.120 slice_significant_wave_height**

The interpolated average height of waves above the sea surface at the center of the corresponding σ_0 slice. Wave height measurements are based on data provided by the National Centers for Environmental Prediction (NCEP) of the National Oceanographic and Atmospheric Administration (NOAA). SMAP radar data processing employs the *slice_significant_wave_height* over the ocean surface as a means to track long term trends of the radar instrument. These data appear only for sigma0s acquired over the oceans.

slice_significant_wave_height lists a null value for all radar footprints over land.

slice_significant_wave_height is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.0
Valid_max: 15.0
Units: meters

4.6.121 slice_slant_range

The mean of the sight distance between the instantaneous location of the SMAP antenna and the center of the sigma0 slice.

slice_slant_range is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 700000.0
Valid_max: 1100000.0
Units: meters

4.6.122 slice_snr_hh

The signal to noise ratio for the normalized radar cross section measure of the corresponding slice that was transmitted and received in the horizontal polarization channel.

slice_snr_hh is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.001
Valid_max: 1000.0
Units: n/a

4.6.123 slice_snr_hv

The signal to noise ratio for the normalized radar cross section measure of the corresponding slice that was transmitted from the vertical polarization channel and received in the horizontal polarization channel.

slice_snr_hv is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.001
Valid_max: 1000.0
Units: n/a

4.6.124 slice_snr_vh

The signal to noise ratio for the normalized radar cross section measure of the corresponding slice that was transmitted from the horizontal polarization channel and received in the vertical polarization channel.

slice_snr_vh is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.001
Valid_max: 1000.0
Units: n/a

4.6.125 slice_snr_vv

The signal to noise ratio for the normalized radar cross section measure of the corresponding slice that was transmitted and received in the vertical polarization channel.

slice_snr_vv is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.001
Valid_max: 1000.0
Units: n/a

4.6.126 slice_wind_speed

The interpolated speed of sea surface winds at the center of the corresponding σ_0 slice. Wind measurements are based on data provided by the National Centers for Environmental Prediction (NCEP) of the National Oceanographic and Atmospheric Administration (NOAA). SMAP radar data processing employs the *slice_wind_speed* over the ocean surface as a means to track long term trends of the radar instrument. Thus, *slice_wind_speed* values only appear in sigma0 cells that were acquired over the oceans. *slice_wind_speed* lists a null value for all radar footprints over land.

slice_wind_speed is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.0
Valid_max: 75.0
Units: meters/second

4.6.127 slice_wind_direction

The interpolated direction of sea surface winds at the center of the corresponding σ_0 slice. Wind direction is measured as the clockwise rotation from local North ([meteorological convention](#)). Wind measurements are based on data provided by the National Centers for Environmental Prediction (NCEP) of the National Oceanographic and Atmospheric Administration (NOAA). SMAP radar data processing employs the *slice_wind_direction* over the ocean surface as a means to track long term trends of the radar instrument. Thus, *slice_wind_direction* values only appear in sigma0 cells that were acquired over the oceans. *slice_wind_direction* lists a null value for all radar footprints over land.

slice_wind_direction is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.0
Valid_max: 359.99
Units: degrees

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

4.6.128 slice_x_factor_hh

The factor used to convert energy measure to a normalized radar cross section for the signal associated with the corresponding slice that was transmitted and received in the horizontal polarization channel.

slice_x_factor_hh is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.0
Valid_max: 1.0e+20
Units: n/a

4.6.129 slice_x_factor_hv

The factor used to convert energy measure to a normalized radar cross section for the signal associated with the corresponding slice that was transmitted from the vertical polarization channel and received in the horizontal polarization channel.

slice_x_factor_hv is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.0
Valid_max: 1.0e+20
Units: n/a

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

4.6.130 slice_x_factor_vh

The factor used to convert energy measure to a normalized radar cross section for the signal associated with the corresponding slice that was transmitted from the horizontal polarization channel and received in the vertical polarization channel.

slice_x_factor_vh is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.0
Valid_max: 1.0e+20
Units: n/a

4.6.131 slice_x_factor_vv

The factor used to convert energy measure to a normalized radar cross section for the signal associated with the corresponding slice that was transmitted and received in the vertical polarization channel.

slice_x_factor_vv is a three-dimensional array. The slower moving dimension index represents the antenna scan. The middle dimension index represents each of the sigma0s acquired during the scan. The fastest moving represents each of the individual sigma0 slices. The slice index increases with increasing slant range.

Type: Float32
Group: Sigma0 Slice Data
Shape: AntennaScan_Sigma0_Slice_Array
Valid_min: 0.0
Valid_max: 1.0e+20
Units: n/a

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

4.6.132 snr_hh

The signal to noise ratio for the normalized radar cross section measure that was transmitted and received in the horizontal polarization channel.

snr_hh is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.001
Valid_max: 1000.0
Units: n/a

4.6.133 snr_hv

The signal to noise ratio for the normalized radar cross section measure that was transmitted from the vertical polarization channel and received in the horizontal polarization channel.

snr_hv is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.001
Valid_max: 1000.0
Units: n/a

4.6.134 snr_vh

The signal to noise ratio for the normalized radar cross section measure that was transmitted from the horizontal polarization channel and received in the vertical polarization channel.

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

snr_vh is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.001
Valid_max: 1000.0
Units: n/a

4.6.135 snr_vv

The signal to noise ratio for the normalized radar cross section measure that was transmitted and received in the vertical polarization channel.

snr_vv is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.001
Valid_max: 1000.0
Units: n/a

4.6.136 wind_speed

The interpolated speed of sea surface winds at the center of the corresponding σ_0 . Wind measurements are based on data provided by the National Centers for Environmental Prediction (NCEP) of the National Oceanographic and Atmospheric Administration (NOAA). SMAP radar data processing employs the *wind_speed* over the ocean surface as a means to track long term trends of the radar instrument. Thus, *wind_speed* values only appear in sigma0 cells that were acquired over the oceans. *wind_speed* lists a null value for all radar footprints over land.

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

wind_speed is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 75.0
Units: meters/second

4.6.137 wind_direction

The interpolated direction of sea surface winds at the center of the corresponding σ_0 . Wind direction is measured as the clockwise rotation from local North ([meteorological convention](#)). Wind measurements are based on data provided by the National Centers for Environmental Prediction (NCEP) of the National Oceanographic and Atmospheric Administration (NOAA). SMAP radar data processing employs the *wind_direction* over the ocean surface as a means to track long term trends of the radar instrument. Thus, *wind_direction* values only appear in sigma0 cells that were acquired over the oceans. *wind_direction* lists a null value for all radar footprints over land.

wind_direction is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 359.99
Units: degrees

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

4.6.138 x_factor_hh

The factor used to convert energy measure to a normalized radar cross section for the signal that was transmitted and received in the horizontal polarization channel.

x_factor_hh is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 1.0e+20
Units: n/a

4.6.139 x_factor_hv

The factor used to convert energy measure to a normalized radar cross section for the signal that was transmitted from the vertical polarization channel and received in the horizontal polarization channel.

x_factor_hv is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 1.0e+20
Units: n/a

4.6.140 x_factor_vh

The factor used to convert energy measure to a normalized radar cross section for the signal that was transmitted from the horizontal polarization channel and received in the vertical polarization channel.

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

x_factor_vh is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 1.0e+20
Units: n/a

4.6.141 *x_factor_vv*

The factor used to convert energy measure to a normalized radar cross section for the signal that was transmitted and received in the vertical polarization channel.

x_factor_vv is a two-dimensional array. The slower moving dimension index represents the antenna scan. The faster moving dimension index represents each of the sigma0s acquired during the scan.

Type: Float32
Group: Sigma0 Data
Shape: AntennaScan_Sigma0_Array
Valid_min: 0.0
Valid_max: 1.0e+20
Units: n/a

4.6.142 *x_pos*

The X component of spacecraft position in the Earth Centered Rotating (ECR) coordinate system interpolated to each instant when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system.

X_pos is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Type: Float32
Group: Spacecraft Data
Shape: AntennaScan_Array
Valid_min: -9999999
Valid_max: 9999999
Units: meters

4.6.143 x_vel

The X component of spacecraft velocity in the Earth Centered Rotating (ECR) coordinate system interpolated to each instant when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system.

X_vel is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: Float32
Group: Spacecraft Data
Shape: AntennaScan_Array
Valid_min: -8000.0
Valid_max: 8000.0
Units: meters/second

4.6.144 yaw

The angular rotation of the instrument fixed frame about the Z axis of the SRF after a 180 degree roll is performed. The Z axis of the SRF runs from the center of mass of the spacecraft toward geodetic nadir. Yaw values are interpolated to each instant when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system.

Yaw is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: Float32
Group: Spacecraft Data
Shape: AntennaScan_Array

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

Valid_min: -3.0
Valid_max: 3.0
Units: degrees

4.6.145 y_pos

The Y component of spacecraft position in the Earth Centered Rotating (ECR) coordinate system interpolated to each instant when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system.

Y_pos is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: Float32
Group: Spacecraft Data
Shape: AntennaScan_Array
Valid_min: -9999999
Valid_max: 9999999
Units: meters

4.6.146 y_vel

The Y component of spacecraft velocity in the Earth Centered Rotating (ECR) coordinate system interpolated to each instant when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system.

Y_vel is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: Float32
Group: Spacecraft Data
Shape: AntennaScan_Array
Valid_min: -8000.0
Valid_max: 8000.0
Units: meters/second

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

4.6.147 z_pos

The Z component of spacecraft position in Earth Centered Rotating (ECR) coordinate system interpolated to each instant when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system.

Z_pos is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: Float32
Group: Spacecraft Data
Shape: AntennaScan_Array
Valid_min: -9999999
Valid_max: 9999999
Units: meters

4.6.148 z_vel

The Z component of spacecraft velocity in the Earth Centered Rotating (ECR) coordinate system interpolated to each instant when the antenna boresight aligns with the X-axis of the SMAP spacecraft coordinate system.

Z_vel is a one-dimensional array. Each array index is representative of a specific antenna scan within the half orbit.

Type: Float32
Group: Spacecraft Data
Shape: AntennaScan_Array
Valid_min: -8000.0
Valid_max: 8000.0
Units: meters/second

5 APPENDIX A – ACRONYMS AND ABBREVIATIONS

This is the standard Soil Moisture Active Passive (SMAP) Science Data System (SDS) list of acronyms and abbreviations. Not all of these acronyms and abbreviations appear in every SMAP SDS document.

ADT	Algorithm Development Team
AMSR	Advanced Microwave Scanning Radiometer
ANSI	American National Standards Institute
AOS	Acquisition of Signal
APF	Algorithm Parameter File
ARS	Agricultural Research Service
ASF	Alaska Satellite Facility
ATBD	Algorithm Theoretical Basis Document
ATLO	Assembly Test Launch and Operations
BFPQ	Block Floating Point Quantization
BIC	Beam Index Crossing
CARA	Criticality and Risk Assessment
CBE	Current Best Estimate
CCB	Configuration Control Board
CCSDS	Consultative Committee on Space Data Systems
CDR	Critical Design Review
CEOS	Committee on Earth Observing Systems
CF	Climate and Forecast (metadata convention)
CM	Configuration Management
CM	Center of Mass
CONUS	Continental United States
COTS	Commercial Off the Shelf
CR	Change Request
DAAC	Distributed Active Archive Center
DB	Database
DBA	Database Administrator

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

dB	decibels
deg	degrees
deg/sec	degrees per second
deg C	degrees Celsius
DEM	Digital Elevation Model
DFM	Design File Memorandum
DIU	Digital Interface Unit
DN	Data Number
DOORS	Dynamic Object Oriented Requirements
DQC	Data Quality Control
DSK	Digital Skin Kernel
DVD	Digital Versatile Disc
EASE	Equal Area Scalable Earth
ECMWF	European Centre for Medium Range Weather Forecasts
ECHO	EOS Clearing House
ECI	Earth Centered Inertial Coordinate System
ECR	Earth Centered Rotating Coordinate System
ECR	Engineering Change Request
ECS	EOSDIS Core System
EDOS	EOS Data Operations System
EM	Engineering Model
EOS	Earth Observing System
EOSDIS	Earth Observing System Data and Information System
EPO	Education and Public Outreach
ESDIS	Earth Science Data and Information System Project
ESDT	Earth Science Data Type
ESH	EDOS Service Header
ESSP	Earth Science System Pathfinder

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

ET	Ephemeris Time
EU	Engineering Units
FOV	Field of View
FRB	Functional Requirements Baseline
FS	Flight System
FSW	Flight Software
F/T	Freeze/Thaw
FTP	File Transfer Protocol
GByte	gigabyte
GDS	Ground Data System
GHA	Greenwich Hour Angle
GHz	gigahertz
GLOSIM	Global Simulation
GMAO	Global Modeling and Assimilation Office
GMT	Greenwich Mean Time
GN	Ground Network
GPMC	Governing Program Management Council
GPP	Gross Primary Production
GPS	Global Positioning System
GSE	Ground Support Equipment
GSFC	Goddard Space Flight Center
HDF	Hierarchical Data Format
HK	Housekeeping (telemetry)
Hz	Hertz
HSD	Health and Status Data
ICE	Integrated Control Electronics
ICESat	Ice, Cloud and Land Elevation Satellite
IDL	Interactive Data Language
I&T	Integration and Test
ICD	Interface Control Document

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

IEEE	Institute of Electrical and Electronics Engineers
IFOV	Instantaneous Field of View
I/O	Input/Output
IOC	In-Orbit Checkout
IRU	Inertial Reference Unit
ISO	International Organization for Standardization
IV&V	Independent Verification and Validation
ITAR	International Traffic in Arms Regulations
I&T	Integration and Test
JPL	Jet Propulsion Laboratory
KHz	kilohertz
km	kilometers
LAN	Local Area Network
LBT	Loopback Trap
LEO	Low Earth Orbit
LEOP	Launch and Early Operations
LOE	Level Of Effort
LOM	Life Of Mission
LOS	Loss of Signal
LSK	Leap Seconds Kernel
LZPF	Level Zero Processing Facility
m	meters
MHz	megahertz
MIT	Massachusetts Institute of Technology
MMR	Monthly Management Review
MOA	Memorandum of Agreement
MOC	Mission Operations Center
MODIS	Moderate Resolution Imaging Spectroradiometer
MOS	Mission Operations System
m/s	meters per second

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

ms	milliseconds
MS	Mission System
NAIF	Navigation and Ancillary Information Facility
NASA	National Aeronautics and Space Administration
NCEP	National Centers for Environmental Protection
NCP	North Celestial Pole
NCSA	National Center for Supercomputing Applications
NEDT	Noise Equivalent Diode Temperature
NEE	Net Ecosystem Exchange
NEN	Near Earth Network
netCDF	Network Common Data Form
NFS	Network File System/Server
NISN	NASA Integrated Services Network
NRT	Near Real Time
NOAA	National Oceanic and Atmospheric Administration
NSIDC	National Snow and Ice Data Center
NVM	Non-Volatile Memory
NWP	Numerical Weather Product
n/a	not applicable
OCO	Orbiting Carbon Observatory
OEF	Orbit Events File
ORBNUM	Orbit Number File
ODT	Object Oriented Data Technology
ORR	Operational Readiness Review
ORT	Operational Readiness Test
OSSE	Observing System Simulation Experiment
OSTC	One Second Time Command
PALS	Passive and Active L-Band System
PALSAR	Phased Array L-Band Synthetic Aperture Radar
PcK	Planetary Constants Kernel

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

PDR	Preliminary Design Review
PPPCS	Pointing, Position, Phasing and Coordinate System
PR	Problem Report
PRF	Pulse Repetition Frequency
PRI	Pulse Repetition Interval
PROM	Programmable Read Only Memory
PSD	Product Specification Document
QA	Quality Assurance
rad	radians
RAM	Random Access Memory
RBA	Reflector Boom Assembly
RBD	Rate Buffered Data
RBE	Radiometer Back End
RDD	Release Description Document
RDE	Radiometer Digital Electronics
RF	Radio Frequency
RFA	Request For Action
RFE	Radiometer Front End
RFI	Radio Frequency Interference
RMS	root mean square
RSS	root sum square
ROM	Read Only Memory
RPM	revolutions per minute
RVI	Radar Vegetation Index
SA	System Administrator
SAR	Synthetic Aperture Radar
S/C	Spacecraft
SCE	Spin Control Electronics
SCLK	Spacecraft Clock
SDP	Software Development Plan

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

SDS	Science Data System
SDT	Science Definition Team
SI	International System
SITP	System Integration and Test Plan
SMAP	Soil Moisture Active Passive
SMEX	Soil Moisture Experiment
SMOS	Soil Moisture and Ocean Salinity Mission
SMP	Software Management Plan
SNR	signal to noise ratio
SOC	Soil Organic Carbon
SOM	Software Operators Manual
SQA	Software Quality Assurance
SPDM	Science Process and Data Management
SPG	Standards Process Group
SPK	Spacecraft Kernel
SQA	Software Quality Assurance
SPS	Science Production Software
SRF	Science Orbit Reference Frame
SRR	System Requirements Review
SRTM	Shuttle Radar Topography Mission
SSM/I	Special Sensor Microwave/Imager
STP	Software Test Plan
sec	seconds
TAI	International Atomic Time
T _b	Brightness Temperature
TBC	To Be Confirmed
TBD	To Be Determined
TBR	To Be Resolved
TBS	To Be Specified
TCP/IP	Transmission Control Protocol/Internet Protocol

December 15, 2014

SMAP L1B_S0_LoRes Product Specification

TEC	Total Electron Content
TM	Trademark
TOA	Time of Arrival
TPS	Third Party Software
UML	Unified Modeling Language
U-MT	University of Montana
USDA	United States Department of Agriculture
UTC	Coordinated Universal Time
V&V	Verification and Validation
VWC	Vegetation Water Content

6 APPENDIX B - SMAP Data Product Specification Documents

SMAP Level 1A Radar Product Specification Document, JPL D-72543 Revision B, July 20, 2015.

SMAP Level 1B Radar (L1B_S0_LoRes) Product Specification Document, JPL D-72544 Revision A, July 20, 2015.

SMAP Level 1A Radiometer Product Specification Document, JPL D-92340 Revision A, July 20, 2015.

SMAP Level 1B Radiometer (L1B_TB) Product Specification Document, JPL D-92339 Revision A, July 20, 2015.

SMAP Level 1C Radiometer (L1C_TB) Product Specification Document, JPL D-72545, June 12, 2014.

SMAP Level 2 Active Soil Moisture (L2_SM_A) Product Specification Document, JPL D-72546, June 12, 2014.

SMAP Level 2 Passive Soil Moisture (L2_SM_P) Product Specification Document, JPL D-72547, June 12, 2014.

SMAP Level 2 Active/Passive Soil Moisture (L2_SM_AP) Product Specification Document, JPL D-72548, June 12, 2014.

SMAP Level 3 Freeze-Thaw (L3_FT_A) Product Specification Document, JPL D-72549, June 12, 2014.

SMAP Level 3 Active Soil Moisture (L3_SM_A) Product Specification Document, JPL D-72550, June 12, 2014.

SMAP Level 3 Passive Soil Moisture (L3_SM_P) Product Specification Document, JPL D-72551, June 12, 2014.

SMAP Level 3 Active/Passive Soil Moisture (L3_SM_AP) Product Specification Document, JPL D-72552, June 12, 2014.

SMAP Level 4 Carbon (L4_C) Product Specification Document, Document Identifier (**TBD**), Date (**TBD**).

Reichle, R. H., R. A. Lucchesi, J. V. Ardizzone, G.-K. Kim, and B. H. Weiss, 2014: Soil Moisture Active Passive (SMAP) Mission Level 4 Surface and Root Zone Soil Moisture (L4_SM) Product Specification Document. GMAO Office Note No. (number to be determined) (Initial Version 1.3), 93 pp.

7 APPENDIX C – SHAPES IN THE L1B_S0_LoRes PRODUCT

Table 23 lists all of the Shapes that appear in the L1B_S0_LoRes Product. The table also lists the rank, the nominal dimensions and the maximum dimensions for each Shape in the L1B_S0_LoRes Product.

The naming convention for shape names places the dimension where consecutive indices represent contiguous storage positions last. The naming convention thus conforms to index representation in the C language.

On the other hand, since a large contingent of the SMAP science community programs are in Fortran, index order of arrays in this document conforms to the Fortran standard. Thus, in array dimension representation, the dimension where consecutive indices represent contiguous storage appears first.

Table 23: Shapes in the SMAP L1B_S0_LoRes Data Product

Shape	Rank	Nominal Product Dimensions	Maximum Product Dimensions
AntennaScan_Array	1	(640)	(759)
AntennaScan_Sigma0_Array	2	(271,640)	(301,759)
AntennaScan_Sigma0_Slice_Array	3	(11,271,640)	(11,301,759)

8 APPENDIX D – L1B_S0_LoRes DIMENSIONS

Table 24 lists all of the Dimensions that are used by data elements in the L1B_S0_LoRes Product. The name of each Dimension matches the name given in the Dimension column below. The table also lists the anticipated nominal value and the maximum value for each dimension that appears in the L1B_S0_LoRes Product.

Table 24: Dimensions in the SMAP L1B_S0_LoRes Product

Dimension	Nominal Size	Maximum Size
AntennaScan	640	759
Sigma0	271	301
Slice	11	11

9 APPENDIX E – L1B_S0_LoRes UNITS

Table 25 lists the Units that are used by the L1B_S0_LoRes product elements. The SMAP implementation of HDF5 stores unit information for each data element in local metadata. The first column in the Table 25 identifies units that apply to data in the L1B_S0_LoRes Product. The second column lists the Common Symbol used to represent the unit. The third column lists the matching Label that appears in the local metadata in the L1B_S0_LoRes Product.

Table 25: Units in the SMAP L1B_S0_LoRes Product

Unit	Common Symbol	Level 1B_S0_LoRes Label	Typical Use
Counts	Counts	counts	number of elements in a set
Degrees	degrees	degrees	angular measure
Dimensionless	n/a		dimensionless quantity
Gigahertz	GHz	GHz	frequency measure
meters per second	m/s	m/s	velocity measure
Megabytes	MBytes	MBytes	computer storage units
Meters	m	m	distance measure
Kilometers	km	km	distance measure
square meters	m ²	m**2	area measure
percent	%	percent	per hundred
seconds	s	sec	time measure
revolutions per minute	rpm	rpm	rotational measure
degrees Celsius	°C	degrees_Celsius	temperature measure